


- NOTES:
备注
1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
 2. Wire screw hole M5
压线螺孔M5
 3. Current Rating: 100A
额定电流: 100A
 4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
 5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

Ordering Information

HC - * * * * - * * * * - * * * * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	IP	Product No.	Material
插板 (插脚)	0.5mm	M5 (螺牙)	1.5 (焊脚)	14x12x12mm	IP67	HC-RG1554-1412-D710-07	黄铜 (黄铜)
螺母 (螺母)	0.5mm	M5 (螺牙)	1.5 (焊脚)	14x12x12mm	IP67	HC-RG1554-1412-D710-07	紫铜 (紫铜)
螺柱 (螺柱)	0.5mm	M5 (螺牙)	1.5 (焊脚)	14x12x12mm	IP67	HC-RG1554-1412-D710-07	紫铜 (紫铜)
螺帽 (螺帽)	0.5mm	M5 (螺牙)	1.5 (焊脚)	14x12x12mm	IP67	HC-RG1554-1412-D710-07	紫铜 (紫铜)
螺柱 (螺柱)	0.5mm	M5 (螺牙)	1.5 (焊脚)	14x12x12mm	IP67	HC-RG1554-1412-D710-07	紫铜 (紫铜)

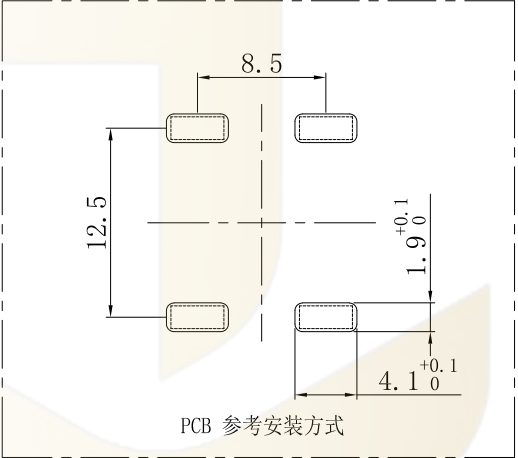

		GENRL TOLERANCE		制图	07		
		DIM	TOL	审核			
		5 or more	±0.35	批准			
		2~5	±0.25	比例			
		0~2	±0.15	SCALE			
		Angle	±3.0°	投影			
1	初版发行	日期					
序号	变更内容	日期					
No.	MODIFY CONTENT	MODIFY DATE					

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO., LTD

产品名称	PCB 焊接端子 厚度1.5 插板 铆垫片	版本	A
TITLE	M5 4焊脚 14x12x12mm	REV.	
产品料号	HC-RG1554-1412-D710-07	单位	mm
PART NO.		页次	1/1
材料		SHEET	