


- NOTES:  
备注
1. Brass or purple copper, Bright tin-plating  
黄铜或紫铜, 镀亮锡
  2. Wire screw hole M4  
压线螺孔M4
  3. Current Rating: 60A  
额定电流:60A
  4. There shall be no defects such as pin deformation and burrs.  
不得有脚变形, 毛刺等缺陷
  5. Unmarked dimensions refer to tolerances  
未标注的尺寸参考公差

**Ordering Information**

HC - \* \*\* \* - \* - \* - \* - \* - \* - \* - \* - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Pin/Pin Spacing	Product No.	Material
Pin 1 Tooth (插牙)	0.8±0.1mm	M3 (螺牙)	2个	1620#16x20mm	Pin Spacing (间距)	产品序号	镀亮铜 (黄铜)
Pin 2 Nut (螺螺母)	1.0±0.1mm	M4 (螺牙)	2个	.....	Pin Dip		镀亮铜 (紫铜)
Pin 3 Gasket (螺垫片)	1.5±0.1mm	M3 (螺牙)	4个				
	2.0±0.2mm	M3 (螺牙)	6个				
	2.5±0.2mm	M3 (螺牙)	8个				
	3.0±0.2mm	M3 (螺牙)	.....				

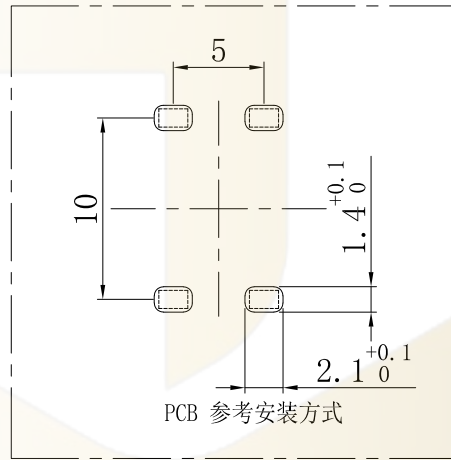

		GENREL TOLERANCE		制图	07		<b>深圳市华灿天禄电子有限公司</b> ShenzhenhuacantianlueLECTRONICS CO., LTD			
		DIM	TOL	审核						
		5 or more	±0.35	批准			产品名称	PCB 焊接端子 厚度1.0 插板 铆垫片	版本	A
		2~5	±0.25	比例			TITLE	M4 4焊脚 11x10x11.2mm	REV.	
		0~2	±0.15	SCALE			产品料号	HC-RG1044-1110-D322-07	单位	mm
序号	变更内容	日期		投影			PART NO.		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE		Angle	±3.0°		MATERIAL		SHEET	