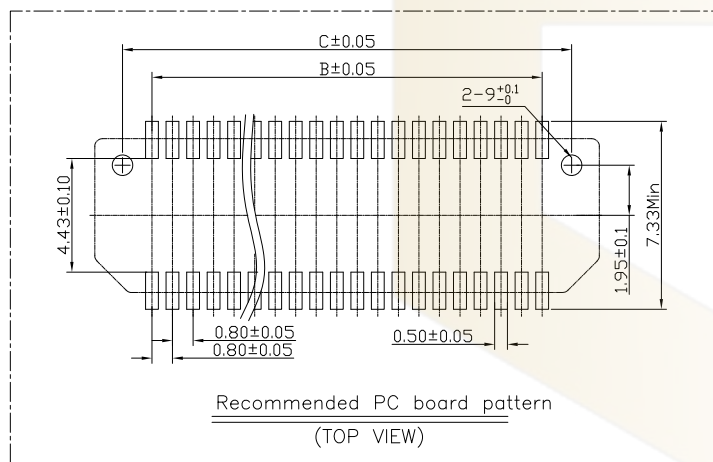
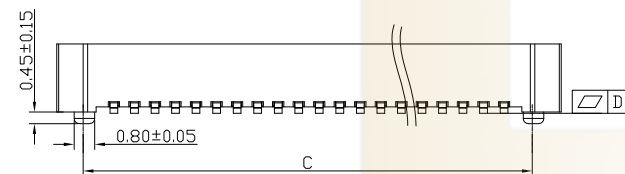

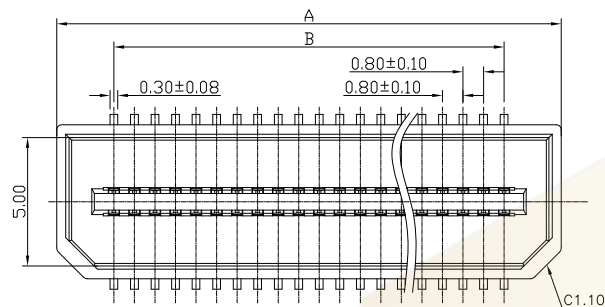


公、母座合高图

- 1.ELECTRICAL REQUIREMENTS
RATED VOLTAGE: 60V AC/DC
RATED CURRENT: 0.5 AMPS
CONTACT RESISTANCE: 60 MΩ MAX.
INSULATION RESISTANCE: INITIAL VALUE OF 1000 MΩ MIN
INSULATION VOLTAGE: 250V AC FOR 1 MINUTE
2.MECHANICAL PERFORMANCE REQUIREMENTS
INSERTION FORCE: MAXIMUM 57.46N.
OUTPUT: MINIMUM 8.50N
3.ENVIRONMENTAL REQUIREMENTS
OPERATING TEMPERATURE: -55 ℃ ~+85℃
4.MATERIALS:
CONTACT: PHOSPHOR BRONZE
HOUSING: HIGH TEMPERATURE UL 94-V0

No.of pins	Dimensions			
	A	B	C	D
12	8.45	4.00	6.30	0.10
14	9.25	4.80	7.10	
16	10.05	5.60	7.90	
20	11.65	7.20	9.50	
22	12.45	8.00	10.30	
24	13.25	8.80	11.10	
26	14.05	9.60	11.90	
30	15.65	11.20	13.50	
34	17.25	12.80	15.10	0.15
40	19.65	15.20	17.50	
50	25.85	19.20	21.50	
60	29.85	23.20	25.50	
64	31.45	24.80	27.10	
80	37.85	31.20	33.50	
100	45.85	39.20	41.50	
120	53.85	47.20	49.50	
140	61.85	55.20	57.50	

Ordering Information

HC-PBB 08 AXN - * - N - * - H* - ** - R - P -06

PITCH
05=0.5mm
08=0.8mm

1= 单槽
2= 双槽

No. of Pins (Pin 1 to Pin 14)
12P~140P

Nature
M=Male
F=Female

Plastic Height(H)
H2.72~2.72mm

Contact
G1:1u" Gold

Plating
R=Reel
+Csp (1000:2)

Post
(10:1)

12=12Pin
14=14Pin

.....

			GENERAL TOLERANCE		制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审核 CHECK				
			X.X	±0.30	批准 APPROVAL				
			X.XX	±0.20	比例 SCALE				
			X.XXX	±0.10	投影 Projection				
			Angle	±3.0°					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE				产品名称 TITLE	BTB 0.8 单槽 公座 立贴 带柱 编带+盖	版本 REV.	A
1	初版发行					产品料号 PART NO.	HC-PBB08AXN-1-N-M-H2. 72-XX-R-P-06	单位 UNITS	mm
						材料 MATERIAL		页次 SHEET	1/1