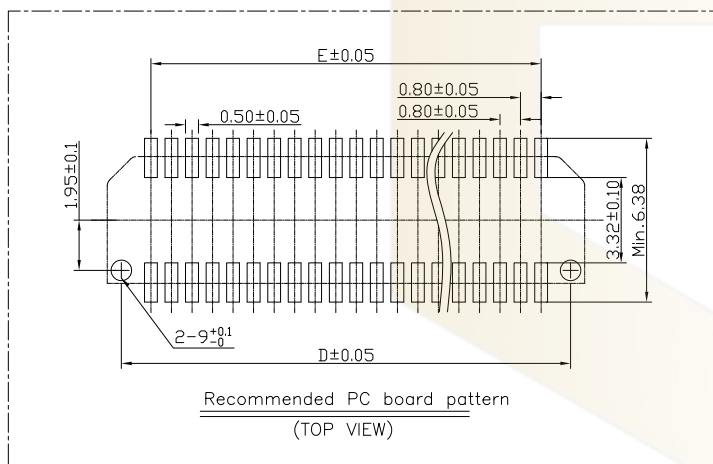
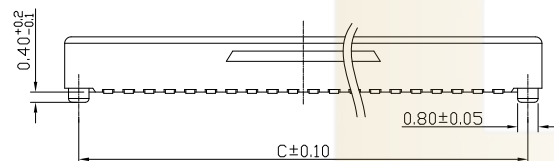

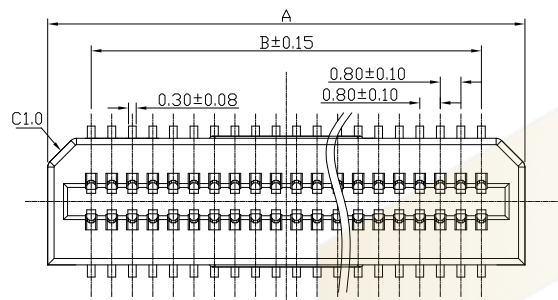


公、母座合高图

- 1.ELECTRICAL REQUIREMENTS
RATED VOLTAGE: 60V AC/DC
RATED CURRENT: 0.5 AMPS
CONTACT RESISTANCE: 60 MΩ MAX.
INSULATION RESISTANCE: INITIAL VALUE OF 1000 MΩ MIN
INSULATION VOLTAGE: 250V AC FOR 1 MINUTE
2.MECHANICAL PERFORMANCE REQUIREMENTS
INSERTION FORCE: MAXIMUM 57.46N.
OUTPUT: MINIMUM 8.50N
3.ENVIRONMENTAL REQUIREMENTS
OPERATING TEMPERATURE: -55 ℃ ~+85℃
4.MATERIALS:
CONTACT: PHOSPHOR BRONZE
HOUSING: HIGH TEMPERATURE UL 94-V0

NO. of pins	Dimension table(mm)					
	A	B	C	D	E	F
12	7.40	4.00	6.30	6.30	4.00	0.10
14	8.20	4.80	7.10	7.10	4.80	
16	9.00	5.60	7.90	7.90	5.60	
20	10.60	7.20	9.50	9.50	7.20	
22	11.40	8.00	10.30	10.30	8.00	
24	12.20	8.80	11.10	11.10	8.80	
26	13.00	9.60	11.90	11.90	9.60	
30	14.60	11.20	13.50	13.50	11.20	
34	16.20	12.80	15.10	15.10	12.80	0.15
40	18.60	15.20	17.50	17.50	15.20	
50	22.60	19.20	21.50	21.50	19.20	
60	26.60	23.20	25.50	25.50	23.20	
64	28.20	24.80	27.10	27.10	24.80	
80	34.60	31.20	33.50	33.50	31.20	
100	42.60	39.20	41.50	41.50	39.20	
120	50.60	47.20	49.50	49.50	47.20	
140	58.60	55.20	57.50	57.50	55.20	

Ordering Information

HC-PBB 08 AXN - * - N - * - H* - ** - R - P -06

PITCH
05=0.5mm
08=0.8mm

1= 单槽
2= 双槽

No. of Pins (Pin 1 in 1)

Nature
M=Male
F=Female

Plastic Height
H2.2=2.2mm

Contact Plating
G1:1u" Gold

R=Reel
P=Post
(按图 2)

12=12Pin

14=14Pin

.....

			GENERAL TOLERANCE		制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审 核 CHECK				
			X. X	± 0.30	批 准 APPROVAL	产品名称 TITLE	BTB 0.8 单槽 母座 立贴 带柱 编带+盖	版 本 REV.	A
			X. XX	± 0.20	比 例 SCALE	产品料号 PART NO.	HC-PBB08AXN-1-N-F-H2.2-XX-R-P-06	单 位 UNITS	mm
			X. XXX	± 0.10	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE							