
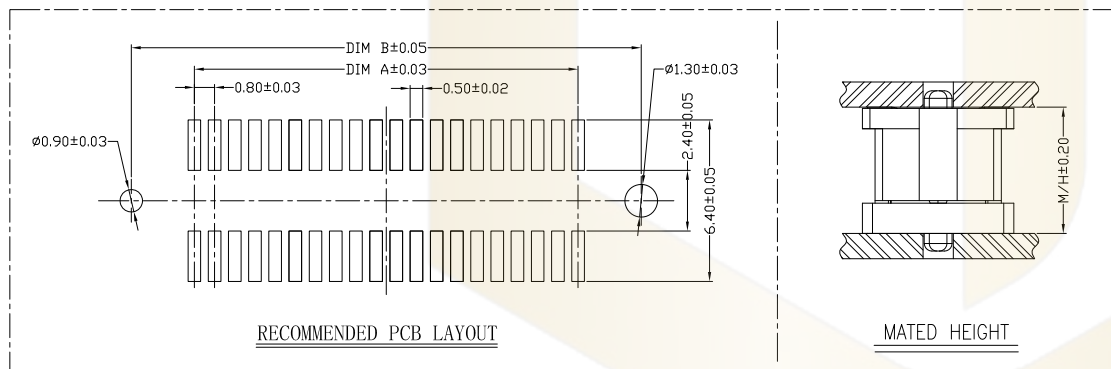

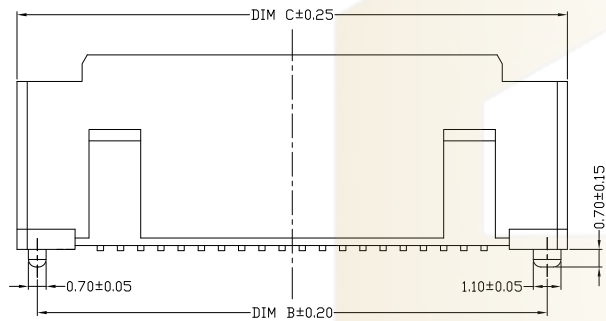


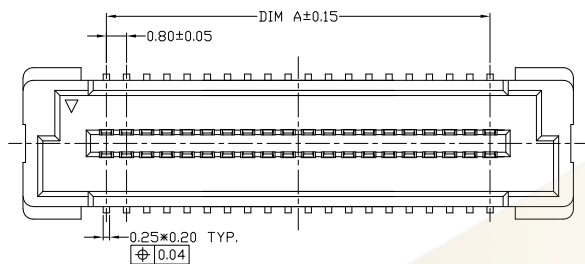

SPECIFICATIONS:

- VOLTAGE/CURRENT RATING: 100V/0.8A AC;
- WITHSTANDING VOLTAGE: 500V AC ONE MINUTE;
- INSULATION RESISTANCE: 1000M Ω MIN;
- CONTACT RESISTANCE: 50m Ω MAX;
- OPERATING TEMPERATURE RANGE: -40° C TO 125° C.

MATERIAL:

- INSULATOR: LCP,NATURAL UL94V-0;
- TERMINAL: COPPER ALLOY;

PLATING:

- TERMINAL: GOLD PLATING(CONTACT AREA);
TIN PLATING(TAIL AREA)
UNDER PLATING:NICKEL 40u" MIN.

FEMALE H2	MATED HEIGHT			
	MALE H1			
4.7	5.7	6.7	7.7	
3.7	5.0	6.0	7.0	8.0
7.7	9.0	10.0	11.0	12.0
11.7	13.0	14.0	15.0	16.0
15.7	17.0	18.0	19.0	20.0

No.of contacts	Dimensions		
	A	B	C
20	7.20	12.20	13.80
30	11.20	16.20	17.80
40	15.20	20.20	21.80
50	19.20	24.20	25.80
60	23.20	28.20	29.80
80	31.20	36.20	37.80
100	39.20	44.20	45.80
120	47.20	52.20	53.80
140	55.20	60.20	61.80

Ordering Information

HC-PBB 08 - * - N - * - H* - ** - R - P -07

PITCH
05=0.5mm
08=0.8mm

1= 单槽
2= 双槽

No.of
Pins (Pin 1 to 18)
20P~160P

Nature
M=Male
F=Female

Plastic
Height(H1)
H4.7=4.7mm
H5.7=5.7mm
H6.7=6.7mm
H7.7=7.7mm

Contact
G1:1u" Gold

Plating
Gold

R=Reel
(18±2)

Post
(18±2)

			GENERAL TOLERANCE		制 图 DRAWING		 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审 核 CHECK					
			X. X	±0.30	批 准 APPROVAL		产品名称 TITLE	BTB 0.8 单槽 公座 立贴 带柱 编带+盖	版 本 REV.	A
			X. XX	±0.20	比 例 SCALE		产品料号 PART NO.	HC-PBB08-1-N-M-HX-XX-R-P-07	单 位 UNITS	mm
			X. XXX	±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle		±3.0°					