

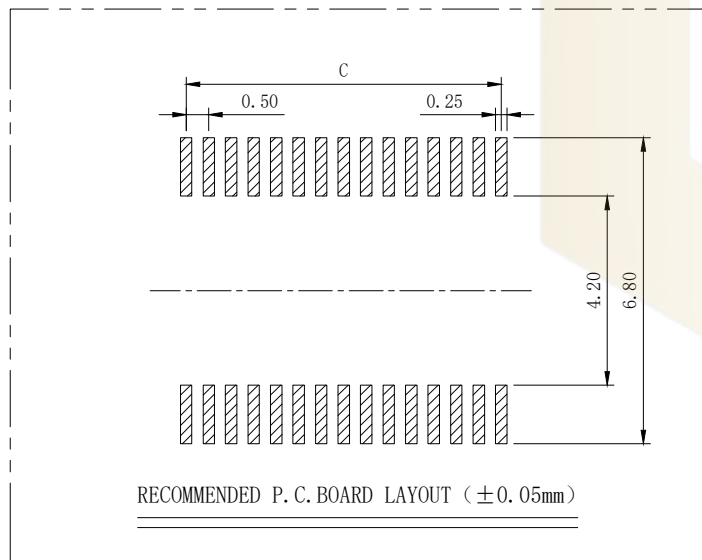
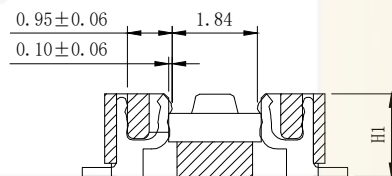


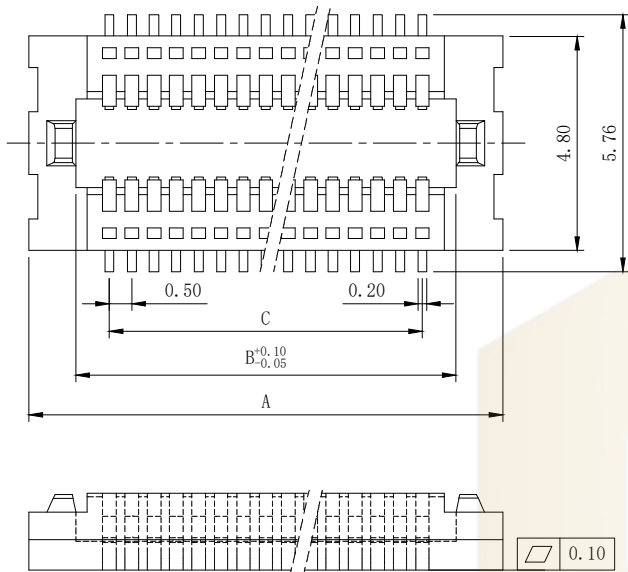

RECOMMENDED P. C. BOARD LAYOUT (±0.05mm)

H	H1
1.50	1.35
2.00	1.85
2.50	2.35

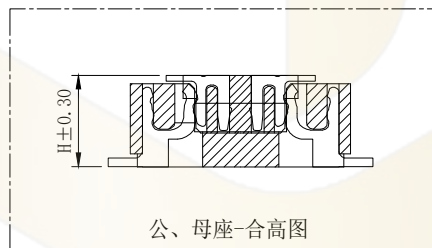

公、母座-合高图

Electrical

Voltage: 50V AC(rms)/DC
Current: 0.5A AC(rms)/DC
Contact Resistance: 60 mΩ max(initial)
Dielectric Withstanding Voltage: 200 V AC/rms
Insulation Resistance: 500 MΩ min
Operating Temp: -25℃ ~ +85℃

MATERIAL:

HOUSING: LCP NATURE(UL94V-0)
TERMINAL: PHOSPHOR BRONZE C5191R-H

NO.of contacts	Dimensions			NO.of contacts	Dimensions		
	A	B	C		A	B	C
08	5.10	3.00	1.50	46	14.60	12.50	11.00
10	5.60	3.50	2.00	48	15.10	13.00	11.50
12	6.10	4.00	2.50	50	15.60	13.50	12.00
14	6.60	4.50	3.00	52	16.10	14.00	12.50
16	7.10	5.00	3.50	54	16.60	14.50	13.00
18	7.60	5.50	4.00	56	17.10	15.00	13.50
20	8.10	6.00	4.50	58	17.60	15.50	14.00
22	8.60	6.50	5.00	60	18.10	16.00	14.50
24	9.10	7.00	5.50	62	18.60	16.50	15.00
26	9.60	7.50	6.00	64	19.10	17.00	15.50
28	10.10	8.00	6.50	66	19.60	17.50	16.00
30	10.60	8.50	7.00	68	20.10	18.00	16.50
32	11.10	9.00	7.50	70	20.60	18.50	17.00
34	11.60	9.50	8.00	72	21.10	19.00	17.50
36	12.10	10.00	8.50	74	21.60	19.50	18.00
38	12.60	10.50	9.00	76	22.10	20.00	18.50
40	13.10	11.00	9.50	78	22.60	20.50	19.00
42	13.60	11.50	10.00	80	23.10	21.00	19.50
44	14.10	12.00	10.50				

Ordering Information

HC-PBB 05 - * - N - * - H* - ** - R - * -06

PITCH
05=0.5mm
06=0.8mm

1= 单槽
2= 双槽

No.of
Pins (2Pin起)
08P~80P

Nature
M=Male
F=Female

Plastic
Height
H1.35=1.35mm
H1.85=1.85mm
H2.35=2.35mm

Contact
G1:1u" Gold

Plating
Gold

R=Reel
(编带)

P=Post
(带柱)

			GENERAL TOLERANCE	制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL	产品名称 TITLE	BTB 0.5 单槽 母座 立贴 编带	版 本 REV.	A	
1	初版发行		X.XX ±0.20	比 例 SCALE	产品料号 PART NO.	HC-PBB05-1-N-F-HX-XX-R-06	单 位 UNITS	mm	
			X.XXX ±0.10						
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1