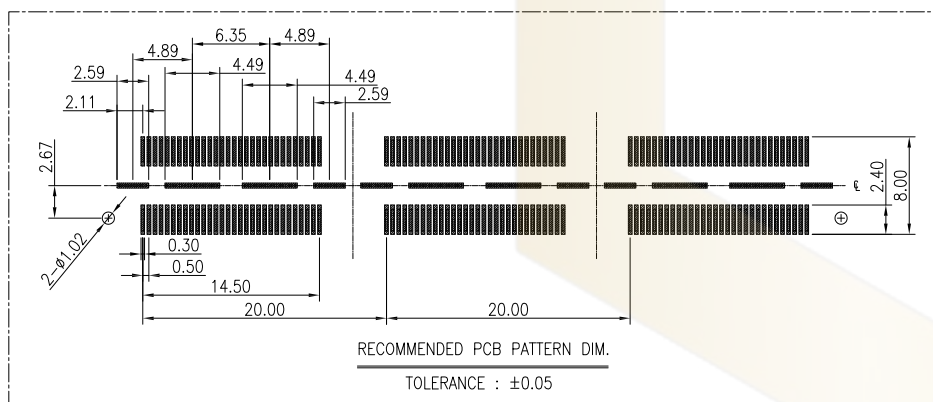
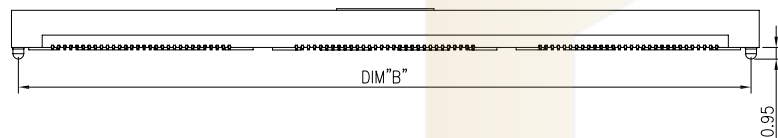
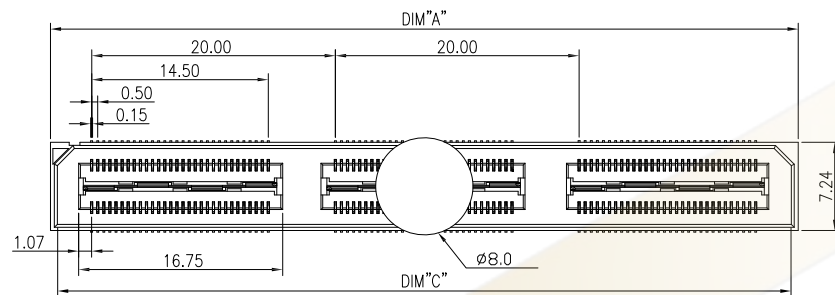


- 1.ELECTRICAL REQUIREMENTS
RATED VOLTAGE: 50V AC/DC
RATED CURRENT: 0.5 AMPS
CONTACT RESISTANCE: 60 MΩ MAX.
INSULATION RESISTANCE: INITIAL VALUE OF 1000 MΩ MIN
INSULATION VOLTAGE: 250V AC FOR 1 MINUTE
2.ENVIRONMENTAL REQUIREMENTS
OPERATING TEMPERATURE: -55 °C ~+85°C
3.MATERIALS:
TERMINAL/GROUND PLANE:PHOSPHOR BRONZE
PLATING:10u" GOLD IN CONTACT AREA,MATTE TIN ON TAIL.
HOUSING: LCP HIGH-TEMP THERMOPLASTIC UL94-V0
COLOR:BLACK

No. of contacts	Dimensions			
	A.	B.	C.	D.
60	21.38	20.13	20.18	0.10
120	41.38	40.13	40.18	0.10
180	61.38	60.13	60.18	0.15
240	81.38	80.13	80.18	0.15
300	101.38	100.13	100.18	0.15

Ordering Information

HC-PBB 05 QH - * - N - * - H* - ** - R - P -06

1= 单槽
2= 双槽
No. of Pins (P/Pin)
20P~300P
20=20Pin
40=40Pin
.....
Nature
F=Female
Plastic Height(H)
H3.25=3.25mm
Contact Plating
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
R=Reel
+Cap
(R/R)

			GENREL TOLERANCE	制 图 DRAWING	06	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK					
			X. X ±0.30	批 准 APPROVAL		产品名称 TITLE	BTB 0.5 双槽 高速型母座 立贴 带柱 编带+盖	版 本 REV.	A
1	初版发行		X. XX ±0.20	比 例 SCALE		产品料号 PART NO.	HC-PBB05QH-2-N-F-H3.25-XX-R-P-06	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	X. XXX ±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
			Angle ±3.0°						