


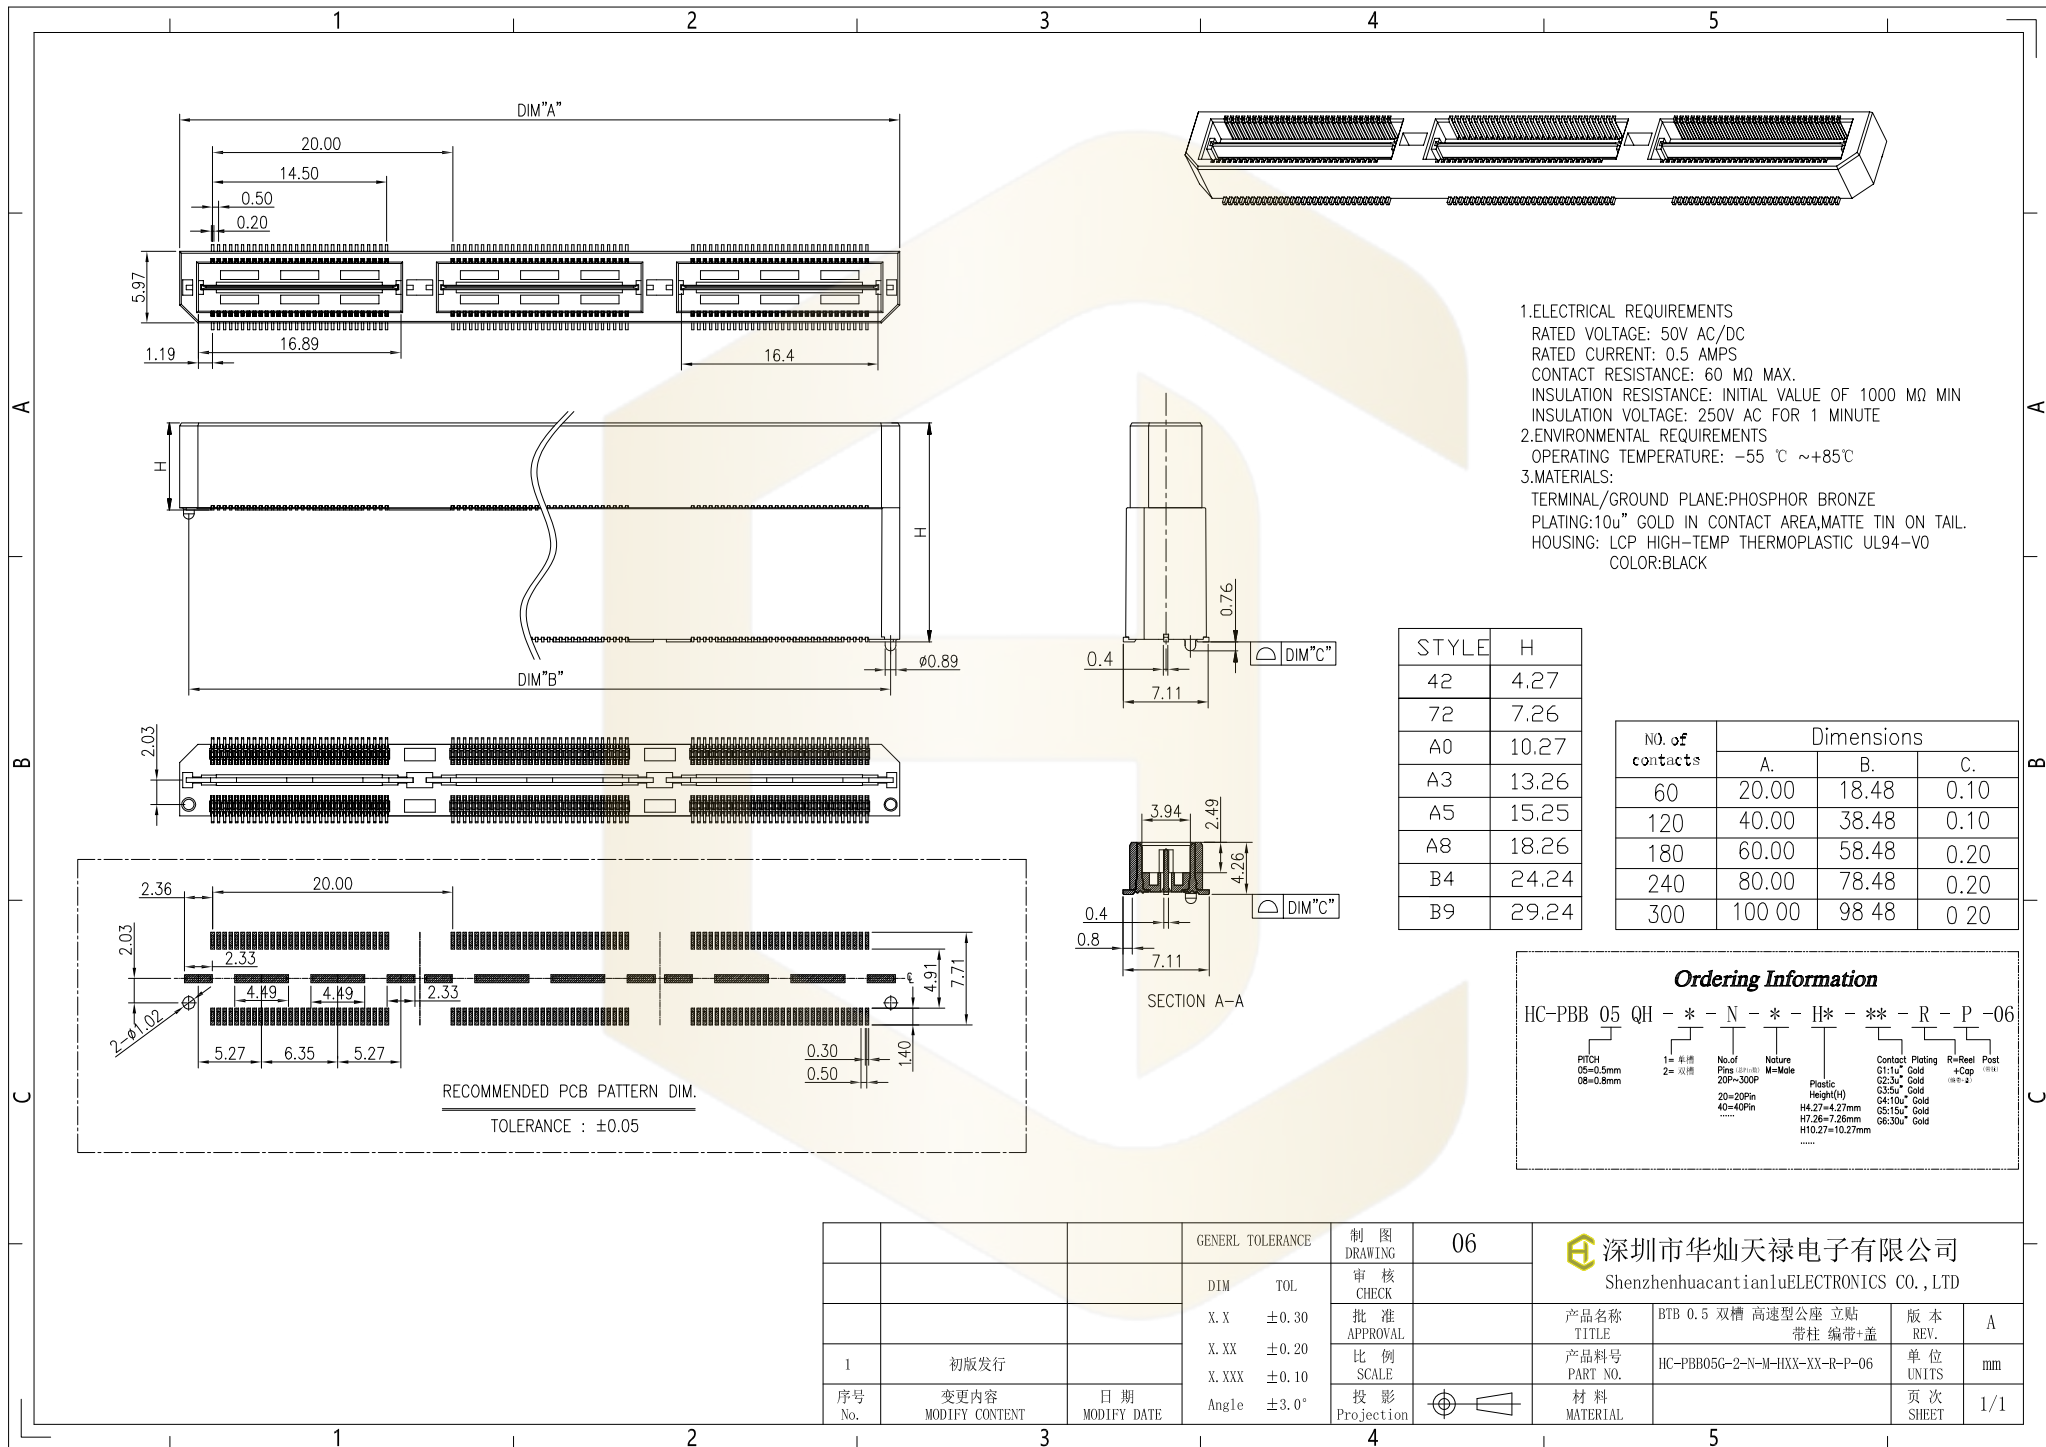

- 1.ELECTRICAL REQUIREMENTS
RATED VOLTAGE: 50V AC/DC
RATED CURRENT: 0.5 AMPS
CONTACT RESISTANCE: 60 M Ω MAX.
INSULATION RESISTANCE: INITIAL VALUE OF 1000 M Ω MIN
INSULATION VOLTAGE: 250V AC FOR 1 MINUTE
2.ENVIRONMENTAL REQUIREMENTS
OPERATING TEMPERATURE: -55 $^{\circ}$ C ~+85 $^{\circ}$ C
3.MATERIALS:
TERMINAL/GROUND PLANE:PHOSPHOR BRONZE
PLATING:10u" GOLD IN CONTACT AREA,MATTE TIN ON TAIL.
HOUSING: LCP HIGH-TEMP THERMOPLASTIC UL94-V0
COLOR:BLACK

STYLE	H
42	4.27
72	7.26
A0	10.27
A3	13.26
A5	15.25
A8	18.26
B4	24.24
B9	29.24

NO. of contacts	Dimensions		
	A.	B.	C.
60	20.00	18.48	0.10
120	40.00	38.48	0.10
180	60.00	58.48	0.20
240	80.00	78.48	0.20
300	100.00	98.48	0.20

Ordering Information

HC-PBB 05 QH - * - N - * - H* - ** - R - P -06

PITCH
05=0.5mm
08=0.8mm

1= 单槽
2= 双槽

No of Pins (P/Pin)
20P~300P
40=40Pin
.....

Nature
M=Mole

Plastic Height(H)
20=20Pin
H4.27=4.27mm
H7.26=7.26mm
H10.27=10.27mm
.....

Contact
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold

Plating

R=Reel
+Cap
(185-2)

Post
(185)

		GENERAL TOLERANCE		制 图 DRAWING	06				 深圳市华灿天禄电子有限公司 ShenzhenhuacantianlueELECTRONICS CO.,LTD					
		DIM TOL		审 核 CHECK					产品名称 TITLE		BTB 0.5 双槽 高速型公座 立贴		版 本 REV.	A
		X. X ±0.30		批 准 APPROVAL					产品料号 PART NO.		带柱 编带+盖			
1 初版发行		X. XX ±0.20		比 例 SCALE					HC-PBB05G-2-N-M-HXX-XX-R-P-06		单位 UNITS		mm	
		X. XXX ±0.10												
序号 No.		变更内容 MODIFY CONTENT		日 期 MODIFY DATE	Angle ±3.0°	投 影 Projection				材 料 MATERIAL		页 次 SHEET		1/1