

NOTES:

- VOLTAGE: 30V AC/DC
- CURRENT: 0.3A/SIGNAL CONTACT, 7A/POWER CONTACT
- OPERATION TEMPERATURE: -40°C TO +85°C
- CONTACT RESISTANCE: 90mΩ/SIGNAL CONTACT, 30mΩ/POWER CONTACT
- INSULATION RESISTANCE: 50mΩ MIN INITIAL
- DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE
- DURABILITY: 30 CYCLES
- IR REFLOW CYCLE: 2 CYCLES MAX.

TABLE






No.of PIN	DIM							
	A	B	C	D	E	F	G	H
06PIN	2.35	2.31	0.70	1.60	1.665	2.12	1.56	1.06
10PIN	3.05	3.01	1.40	1.60	2.365	2.82	2.26	1.80
12PIN	3.40	3.36	1.75	1.80	2.715	3.17	2.61	2.10
16PIN	4.10	4.06	2.45	1.80	3.415	3.87	3.31	2.10
24PIN	5.50	5.46	3.85	1.80	4.815	5.27	4.71	2.10
30PIN	6.55	6.51	4.90	1.80	5.865	6.32	5.76	2.10
32PIN	6.90	6.86	5.25	1.80	6.215	6.67	6.11	2.10
34PIN	7.25	7.21	5.60	1.80	6.565	7.02	6.46	2.10
40PIN	8.30	8.26	6.65	1.80	7.615	8.07	7.51	2.10
48PIN	9.70	9.66	8.05	1.80	9.015	9.47	8.91	2.10
50PIN	10.05	10.01	8.40	1.80	9.365	9.82	9.26	2.10
60PIN	11.80	11.76	10.15	1.80	11.115	11.57	11.01	2.10

Ordering Information

HC-PBB13C - N** - 0.35V - ** - 07

No. of Pins: 06-60Pin
Nature: DP=Male, DS=Female
PITCH: 0.35V=0.35mm
Stacking Height (H): 0.6=0.6mm

			GENERAL TOLERANCE	制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianlueELECTRONICS CO., LTD			
			DIM TOL	审 核 CHECK				
			X. X ±0.30	批 准 APPROVAL	产品名称 TITLE	0.35 单槽 立贴 公座 (BTB)	版 本 REV.	A
			X. XX ±0.20	比 例 SCALE	产品料号 PART NO.	HC-PBB13C-NDP-0.35V-0.6-07	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°	投 影 Projection	材料 MATERIAL		页 次 SHEET	1/2

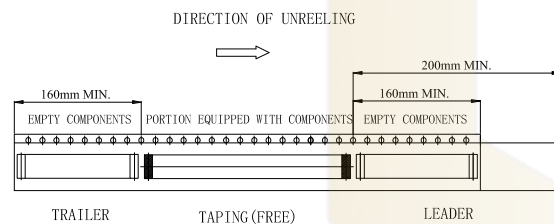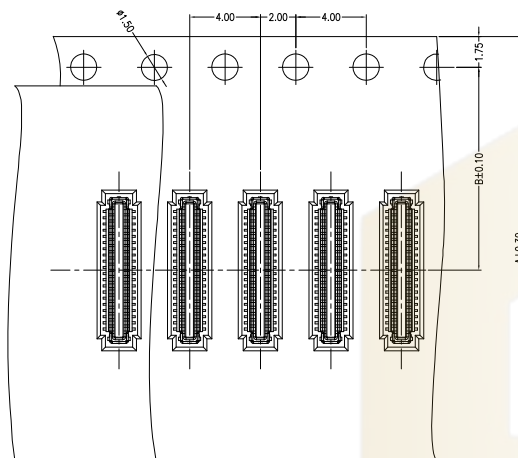

PER REEL 15000 CONNECTORS

TABLE

No.of PIN	DIM						
	A	B	C	D	E	F	G
06PIN	12.0	5.5	2.46	13.5	17.5	330	80
10PIN	16.0	7.5	3.16	17.5	21.5	330	80
12PIN	16.0	7.5	3.51	17.5	21.5	330	80
16PIN	16.0	7.5	4.21	17.5	21.5	330	80
24PIN	16.0	7.5	5.61	17.5	21.5	330	80
30PIN	16.0	7.5	6.66	17.5	21.5	330	80
32PIN	24.0	11.5	7.01	25.5	29.5	330	80
34PIN	24.0	11.5	7.36	25.5	29.5	330	80
40PIN	24.0	11.5	8.41	25.5	29.5	330	80
48PIN	24.0	11.5	9.81	25.5	29.5	330	80
50PIN	24.0	11.5	10.16	25.5	29.5	330	80
60PIN	24.0	11.5	11.91	25.5	29.5	330	80

			GENE RL TOLERANCE		制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianlueLECTRONICS CO.,LTD			
			DIM	TOL	审 核 CHECK				
			X. X	±0.30	批 准 APPROVAL	产品名称 TITLE	0.35 单槽 立贴 公座 (BTB)包装图	版 本 REV.	A
1	初版发行		X. XX	±0.20	比 例 SCALE	产品料号 PART NO.	HC-PBB13C-NDP-0.35V-0.6-07	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°	投 影 Projection	材料 MATERIAL		页 次 SHEET	2/2