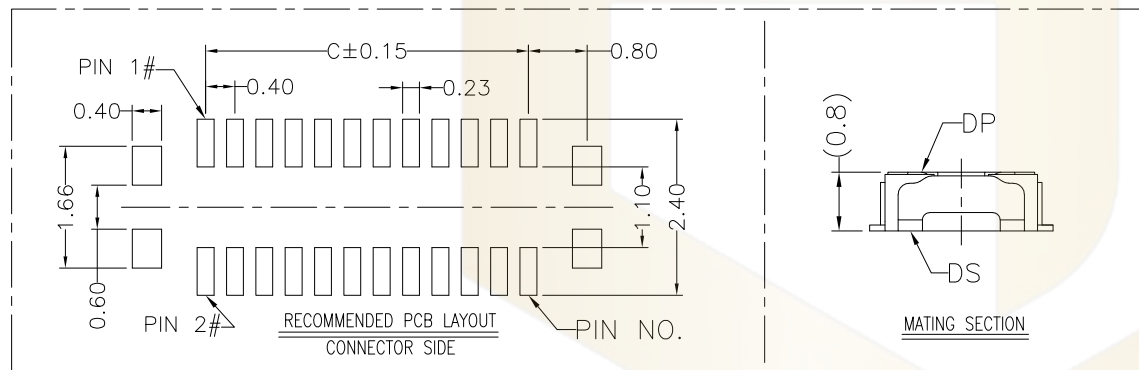

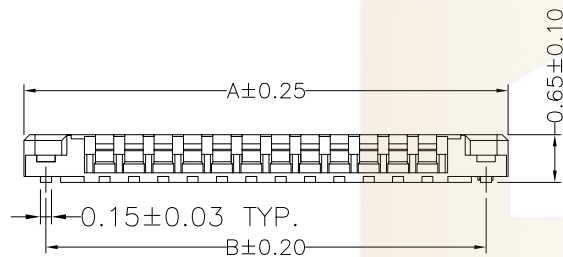
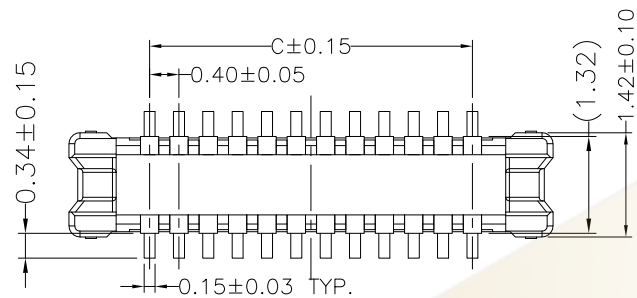


SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50M Ω MIN;
- 4.CONTACT RESISTANCE: 100m Ω MAX;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:

- 1.INSULATOR: LCP+%30 FIBER UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY C5210;
- 3.METAL FITTINGS: COPPER ALLOY C5210.
- 4.THIS PRODUCT COMPLIES WITH RoSH STANDARDS.

PLATING:

- 1.TERMINAL: GOLD 1u" PLATING,
NICKEL 40u" MIN. OVER ALL;
- 2.METAL FITTINGS: GOLD 1u" PLATING,
NICKEL 40u" MIN. OVER ALL .

PIN NO.	A	B	C
10	3.80	3.20	1.60
12	4.20	3.60	2.00
14	4.60	4.00	2.40
16	5.00	4.40	2.80
20	5.80	5.20	3.60
24	6.60	6.00	4.40
30	7.80	7.20	5.60
34	8.60	8.00	6.40
40	9.80	9.20	7.60
44	10.60	10.00	8.40
50	11.80	11.20	9.60

Ordering Information

HC-PBB04 - NDP - 0.4V - ** - 07

No. of Pins	Nature	PITCH	Contact Plating
20-120Pin	DP=Male	0.4V=0.4mm	G2:3u" Gold
20-20Pin			S0:1u" Gold/Tin
40=40Pin			S1:3u" Gold/Tin
			S2:5u" Gold/Tin
			S3:10u" Gold/Tin
			S4:15u" Gold/Tin
			S5:30u" Gold/Tin

			GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审核				
			X. X	±0.30	批准	产品名称	BTB 0.4 贴片 公座	版本	A
			X. XX	±0.20	APPROVAL	产品料号	HC-PBB04-NDP-0.4V-XX-07	REV.	
			X. XXX	±0.10	SCALE	PART NO.		单位	mm
序号	变更内容	日期	Angle	±3.0°	投影	材料		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE			Projection	MATERIAL		SHEET	