



公、母座合高图

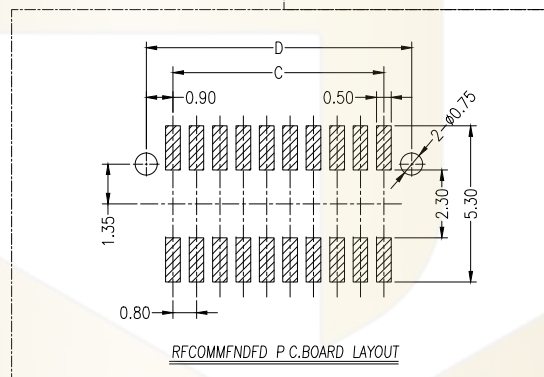

RECOMMENDED P.C. BOARD LAYOUT

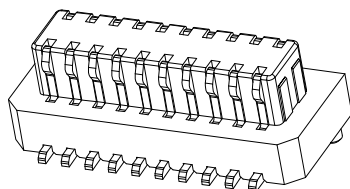

Ass'y High(H)	Plastic High		
	Female 母(H1)	Male 公(H2)/(E)	
4.00	2.90	2.80	1.80
4.50		3.30	
5.00		3.80	
5.50	3.40	4.30	2.30
6.00		4.80	
6.50		5.30	
7.00	3.90		

Specifications
Current Rating: 0.5AMP.
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding Voltage: 200VAC.
Contact Resistance: 20mΩ Max.
Operating Temperature: -40℃to+105℃.

Materials

Contact Material: Phosphor Bronze.
Insulator Material: High Temperature Thermoplastic, UL 94V-0 (Nylon9T) or the equivalent material.

Circuits	Dimension(mm)			
	A	B	C	D
6	4.30	2.80	1.60	3.40
8	5.10	3.60	2.40	4.20
10	5.90	4.40	3.20	5.00
12	6.70	5.20	4.00	5.80
14	7.50	6.00	4.80	6.60
16	8.30	6.80	5.60	7.40
18	9.10	7.60	6.40	8.20
20	9.90	8.40	7.20	9.00
30	13.90	12.40	11.20	13.00
32	14.70	13.20	12.00	13.80
40	17.90	16.40	15.20	17.00
50	21.90	20.40	19.20	21.00
60	25.90	24.40	23.20	25.00

Ordering Information

HC-PBB 08 B - * - N - * - H* - ** - R - P -06

PITCH
05=0.5mm
08=0.8mm

1= 单槽
2= 双槽

No. of Pins (Pins)
6P~60P
6=6Pin
8=8Pin
.....

Nature
M=Male
F=Female

Plastic Height(H2)
H2.8=2.8mm
H3.3=3.3mm
H3.8=3.8mm
H4.3=4.3mm
H4.8=4.8mm
H5.3=5.3mm

Contact Plating
C1:1u" Gold

Reel
=Cap
(3000)

Post
(96)

			GENERAL TOLERANCE	制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核				
			X.X ±0.30	批准	产品名称	BTB 0.8 单槽 B型公座 立贴	版本	A
			X.XX ±0.20	比例	TITLE	带柱 编带+盖	REV.	
1	初版发行		X.XXX ±0.10	SCALE	产品料号	HC-PBB08B-1-N-M-HX-XX-R-P-06	单位	mm
序号	变更内容	日期	Angle ±3.0°	投影	PART NO.		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE		Projection	MATERIAL		SHEET	