

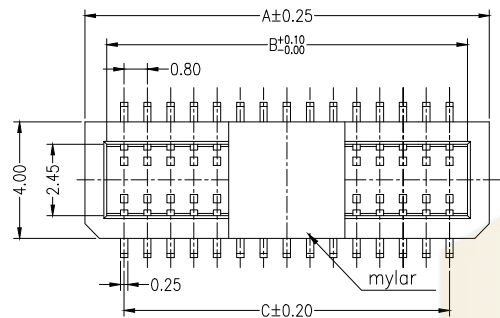



Ass'y High(H)	Plastic High		
	Female 母(H1)	Male 公(H2)/(E)	
4.00	2.90	2.80	1.80
4.50		3.30	
5.00		3.80	
5.50	3.40	4.30	2.30
6.00		4.80	
6.50		5.30	
7.00	3.90		



公、母座合高图

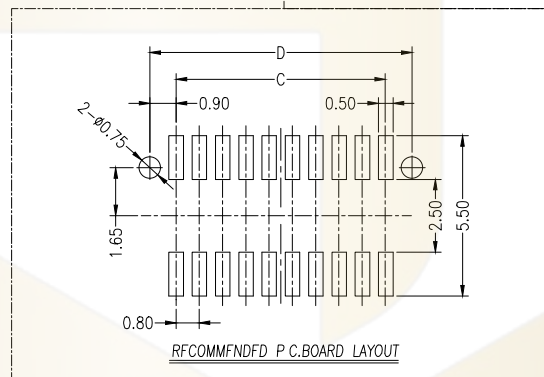

RECOMMENDED P.C. BOARD LAYOUT

Specifications
Current Rating: 0.5AMP.
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding Voltage: 200V AC.
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C.

Materials
Contact Material: Phosphor Bronze.
Insulator Material: High Temperature.
Thermoplastic, UL 94V-0 (Nylon 9T)
or the equivalent material.

Circuits	Dimension(mm)			
	A	B	C	D
6	4.30	2.80	1.60	3.40
8	5.10	3.60	2.40	4.20
10	5.90	4.40	3.20	5.00
12	6.70	5.20	4.00	5.80
14	7.50	6.00	4.80	6.60
16	8.30	6.80	5.60	7.40
18	9.10	7.60	6.40	8.20
20	9.90	8.40	7.20	9.00
30	13.90	12.40	11.20	13.00
32	14.70	13.20	12.00	13.80
40	17.90	16.40	15.20	17.00
50	21.90	20.40	19.20	21.00
60	25.90	24.40	23.20	25.00

Ordering Information

HC-PBB 08 B - * - N - * - H* - ** - R - P -06

PITCH
05=0.5mm
08=0.8mm

1= 单槽
2= 双槽

No. of
Pins (Pin 1 to 60)
6P~60P

Nature
M=Male
F=Female

Plastic
Height(H1)
H2.9=2.9mm
H3.4=3.4mm
H3.9=3.9mm

Contact Plating
G111u Gold

R=Reel
+Cop
(800P~3200P)

Post
(900P)

			GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审核				
			X.X	±0.30	批准	产品名称	BTB 0.8 单槽 B型母座 立贴	版本	A
			X.XX	±0.20	APPROVAL	TITLE	带柱 编带+盖	REV.	
			X.XXX	±0.10	SCALE	产品料号	HC-PBB08B-1-N-F-HX-XX-R-P-06	单位	mm
			Angle	±3.0°	投影	PART NO.		UNITS	
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE			投影 Projection	材料 MATERIAL		页次 SHEET	1/1