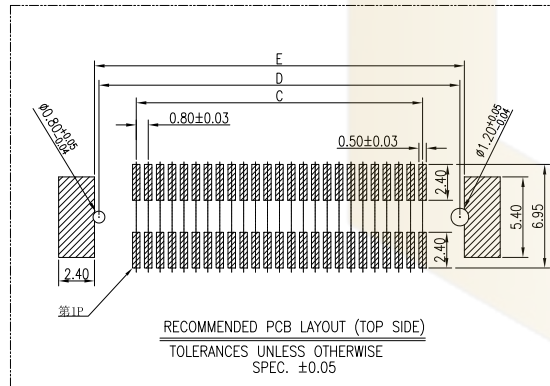


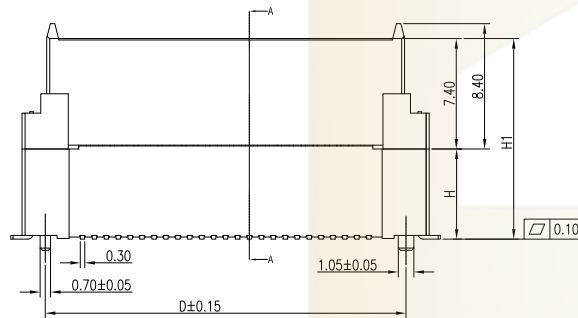

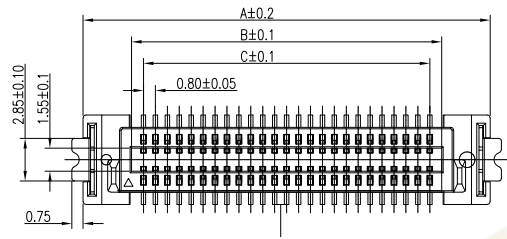


MATED HEIGHT						
Male H1	Female H1					
	7.40	10.40	11.40	12.40	13.40	14.40
8.00	10.00	13.00	14.00	15.00	16.00	17.00
11.00	13.00	16.00	17.00	18.00	19.00	20.00
12.00	14.00	17.00	18.00	19.00	20.00	21.00
13.00	15.00	18.00	19.00	20.00	21.00	22.00
14.00	16.00	19.00	20.00	21.00	22.00	23.00

NOTES:
MATERIAL:
1.HOUSING:THERMO-PLASTIC. UL 94V-0 NATURE
2.CONTACT:PHOSPHOR BRONZE
CONTACT:SEE ORDER INFORMATION; SOLDER:GOLD FLASH
UNDERPLATING:50~120u" NICKEL OVERALL
3.SOLDER TAB:PHOSPHOR BRONZE
TOTAL:80~150u" TIN PLATED OVERALL
UNDERPLATING:50~120u" NICKEL OVERALL

ELECTRICAL:
1.CURRENT RATING:0.5A 50V AC/DC
2.WITHSTANDING VOLTAGE:250V AC for 1 min
3.CONTACT RESISTANCE:65mΩ MAX
4.INSULATION RESISTANCE:100MΩ MIN

ENVIRONMENTAL:
1. OPERATING TEMPERATURE:-55°C TO +125°C.

No. of Pins	Dimension				
	A	B	C	D	E
20	15.30	8.80	7.20	12.2	12.80
30	19.30	12.80	12.20	16.20	16.80
40	23.30	16.80	15.20	20.20	20.80
50	27.30	20.80	19.20	24.20	24.80
60	31.30	24.80	23.20	28.20	28.80
80	39.30	32.80	31.20	36.20	36.80
100	47.30	40.60	39.20	44.20	44.80
120	55.30	48.80	47.20	52.20	52.80
160	71.30	64.80	63.20	68.20	68.80

Ordering Information

HC-PBB 08 D - * - N - * - H* - ** - R - P - 06

PITCH: 08=0.8mm
D: 08
1= 单槽
2= 双槽
No. of Pins: 20P~160P
Nature: M=Male F=Female
Plastic Height(H): H7.4=7.4mm H10.4=10.4mm H11.4=11.4mm H12.4=12.4mm
Contact Plating: G11=11 Gold
R-Reel
P=06