

SPECIFICATION NOTES:

ELECTRICAL:


- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 20mΩ MAX.
- INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

MECHANICAL:

- HOUSING&INSERT&MATERIAL:PBT
- CONTACT MATERIAL:DIA. PHOSPHOR BRONZE
Ø=0.46MM
- PLATING:GOLD PLATING AT CONTACT AREA, NICKEL 30U MIN. OVER ALL
- OPERATING LIFE:750 CYCLES MIN.
- MATING/UNMATING FORCE: 30N/3.06KG MAX.
- RETENTION STRENGTH:50N MIN. FOR 60S±5S

ENVIRONMENTAL:

- STORAGE:-40°C TO +85°C RELATIVE HUMIDITY<80%
- GUARANTEE PERIOD:12 MONTHS
- OPERATION: -40°C TO +85°C
- WAVE SOLDERING TEMPERATURE: 260±5°C 5~10 SECONDS.
MANUAL SOLDERING TEMPERATURE:380±10°C 3~5 SECONDS.
MATES WITH MODULAR PLUG
CONFORMING TO FCC PART 68, SUBPART F.

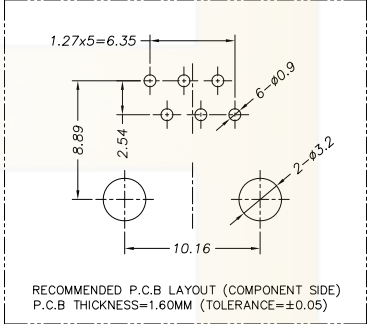

机械性能:	电气特性:	环境特性:
<ol style="list-style-type: none"> 1. 塑料材质: PBT 2. 圆针材质: 磷青铜, Ø0.46mm 3. 圆针电镀: 全区先镀镍底30u Min, 后依订单决定镀金厚度 4. 可靠性: 最少750次插板 5. 插拔/拔出力: 30N/3.06KG Max 6. 配合强度: 50N 60S±5S 	<ol style="list-style-type: none"> 1. 额定电压: 125 VAC RMS 2. 额定电流: 1.5 AMP 3. 接触电阻: 20mΩ Max 4. 绝缘电阻: 1000MΩ Min. @500 VDC 5. 耐压强度: 1000V AC或1500V DC RMS 0.5mA 50Hz 或 60Hz ±5S一分钟 	<ol style="list-style-type: none"> 1. 储存温度: -40°C~+85°C 相对湿度<80% 2. 储存时间: 12个月 3. 工作温度: -40°C~+85°C 4. 波峰焊温度: 260±5°C 5~10S 手工焊接温度: 380±10°C 3~5S

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核 CHECK	产品名称 TITLE	网络插座 (6P/6C 无灯无弹 全塑)	版本 REV.	A
			X.X ±0.30	批准 APPROVAL	产品料号 PART NO.	HC-RJ11-056S-1-6	单位 UNITS	mm
			X.XX ±0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
			X.XXX ±0.10	投影 Projection				
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°					