

NOTES:





- 1.Housing:Glass Filled PA46 BLACK UL94V-0(RoHS).
- 2.Insert:Glass Filled PBT BLACK UL94V-0(RoHS).
- 3.Shielding:0.2mm Thickness Copper Alloywith Nickel Plated(RoHS).
- 4.Contact:0.35x0.44mm Phosphor Bronze,3u"gold Plating Over Nickel (ROHS).
- 5.Led1:YELLOW (RoHS)
- 6.Led2:GREEN (RoHS)
- 7.Durability: 750 Cycles Min;
- 8.Connector Mating,Unmating Force:30N Max.
- 9.Plug Retention Force:50N min, 60s±5s.
- ✱MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.
- ✱The Dimensions Marked"▲" Symbols Are Stand For Key Characteristics.

Electrical specification:

- 1.Voltage Rating:125 VAC RMS.
- 2.Current Rating:1.5A Max @25°C;
- 3.Contact Resistance:20 mΩ Max;
- 4.Insulation Resistance:500 MΩ Min.@500 VDC;
- 5.Dielectric withstanding Voltage:
1000 V DC or AC peak, for 1 minute 0.5 mA contact-to-contact.
1500 V DC or AC peak, for 1 minute 0.5 mA contact to screen and test panel.

Environmental characteristics:

- 1.Stockpile Temperature: - 40°C to + 85°C;
- 2.Operating Temperature: - 40°C to + 85°C;

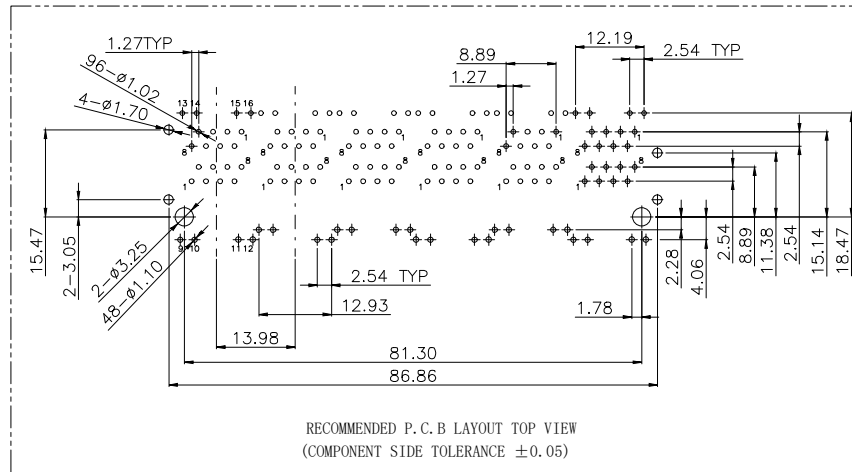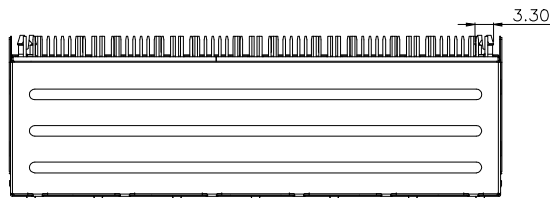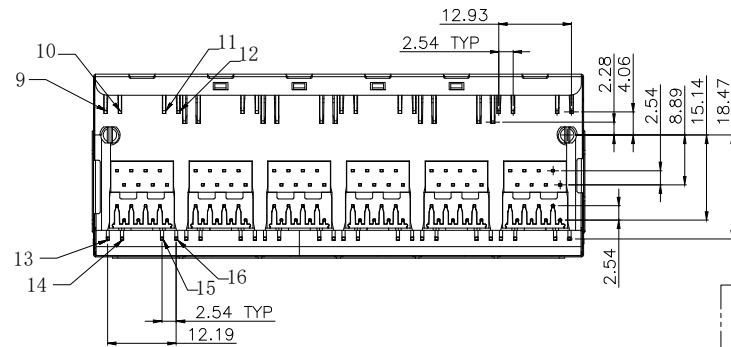

| | | | | | | | | |
|-----------|------------------------|-------------------|------------------|------------------|--|--------------------|-------------|-----|
| | | | GENEAL TOLERANCE | 制图 DRAWING | 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD | | | |
| | | | DIM TOL | 审核 CHECK | 产品名称 TITLE | 网络插座 (带灯无弹) | 版本 REV. | A |
| | | | X.X ±0.30 | 批准 APPROVAL | 产品料号 PART NO. | HC-RJ45-059C-2*6-2 | 单位 UNITS | mm |
| | | | X.XX ±0.20 | 比例 SCALE | 材料 MATERIAL | | 页次 SHEET | 1/1 |
| | | | X.XXX ±0.10 | 投影 Projection | | | | |
| 序号 No. | 变更内容 MODIFY CONTENT | 日期 MODIFY DATE | Angle ±3.0° | | | | | |