

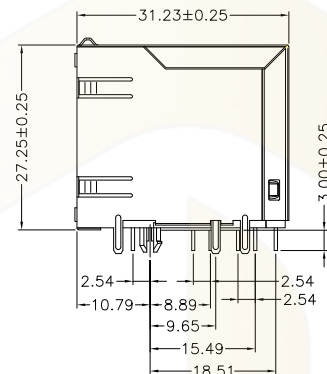


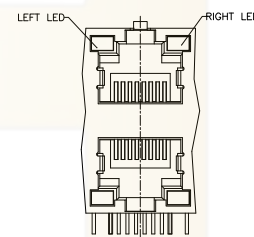

VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

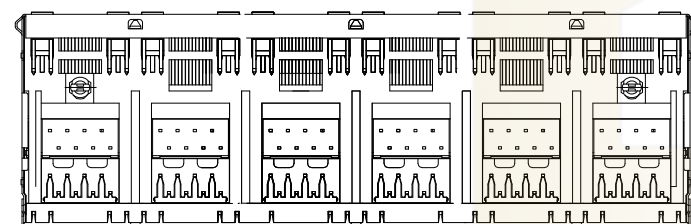

LED LAYOUT





Diagram illustrating the PCB layout for the PHY interface. The PCB side (left) is labeled "PCB SIDE TO PHY" and the cable side (right) is labeled "CABLE SIDE". The pins are numbered 1 through 8 on both sides, connected by horizontal lines.

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Yellow	568nm	20mA	1.85-2.45V
Green	585nm	20mA	1.7-2.2V

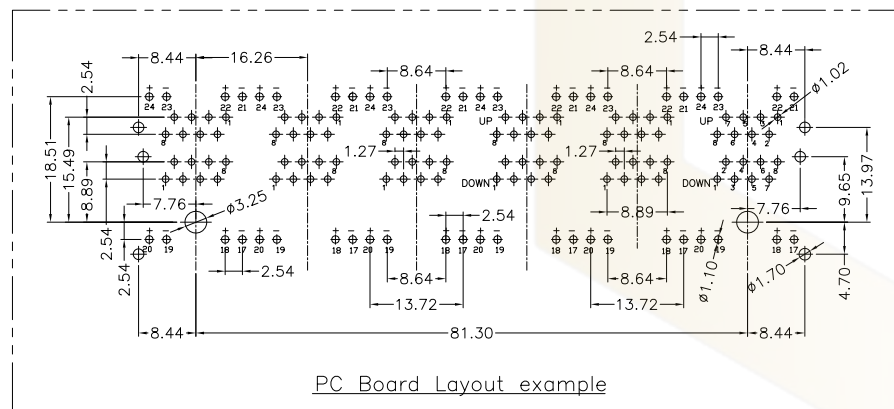

			GENERAL TOLERANCE	制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK				
			X.X ±0.30	批 准 APPROVAL	产品名称 TITLE	网络插座	版 本 REV.	A
1	初版发行		X.XX ±0.20	比 例 SCALE	产品料号 PART NO.	HC-RJ45-059C-2*6-1	单 位 UNITS	mm
			X.XXX ±0.10					
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/1