




TOP VIEW




FRONT VIEW

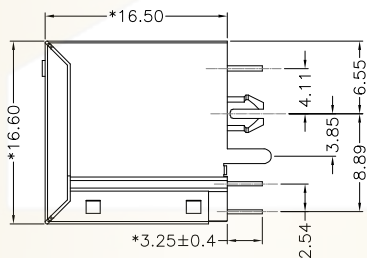


RIGHT SIDE VIEW




BACK VIEW



LEFT SIDE VIEW



BOTTOM VIEW

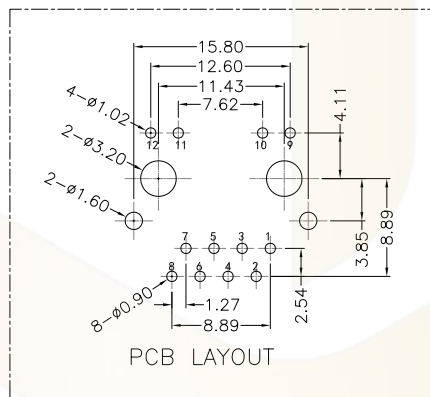

PCB LAYOUT

**MATERIAL:**

HOUSING: PBT,UL94V-0,BLACK.  
 TERMINAL: PHOSPHOR BRONZE T=0.35MM ,  
 6U" GOLD PLATING ON CONTACT AREA.

**MACHANICAL:**



DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
 INSERTION FORCE: 2.2KG.F MAX.  
 RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.  
 OPERATING TEMPERATURE: -40 °C~+85°C.  
 STORAGE TEMPERATURE: -40°C~+85°C.  
 ALL CRITICAL DIMENSIONS WITH "\*"

**ELECTRICAL:**

VOLTAGE: 125 VOLTS AC.  
 CURRENT RATING : 1.5AMP.  
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.  
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL  
 AFTER 500V DC FOR 1 MINUTE.  
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.  
 INITIAL 50 MILLIOHMS MAX. AFTER  
 DURABILITY TEST.

**LED Specification**

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

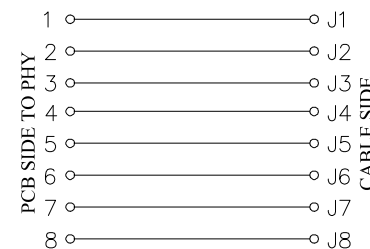

			GENERL TOLERANCE	制图	01	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核					
			X.X ±0.30	批准		产品名称	网络插座(立式 带灯无弹)	版本	A
			X.XX ±0.20	比例		产品料号	HC-RJ45-5224-1-2-01	单位	mm
			X.XXX ±0.10	投影		材料		页次	1/1
序号	变更内容	日期	Angle ±3.0°	Projection		MATERIAL		SHEET	
No.	MODIFY CONTENT	MODIFY DATE							