



MATERIAL:
 HOUSING: PA46,PBT,BLACK.
 TERMINAL: PHOSPHOR BRONZE Ø0.46MM
 G/FU" GOLD PLATING

SHIELD: C2680, T=0.20MM, 20 MIN NICKEL PLATING
 NO ALL AREA


MACHANICAL:
 DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
 INSERTION FORCE: 2.2KG.F MAX.
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
 OPERATING TEMPERATURE: -40 °C~+85 °C.
 STORAGE TEMPERATURE: -40°C~+85°C.
 ALL CRITICAL DIMENSIONS WITH "**"

ELECTRICAL:
 VOLTAGE: 125 VOLTS AC.
 CURRENT RATING : 1.5AMP.
 DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ OR 60HZ, 1 MIN.
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
 AFTER 500V DC FOR 1 MINUTE.
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
 INITIAL 50 MILLIOHMS MAX. AFTER
 DURABILITY TEST.

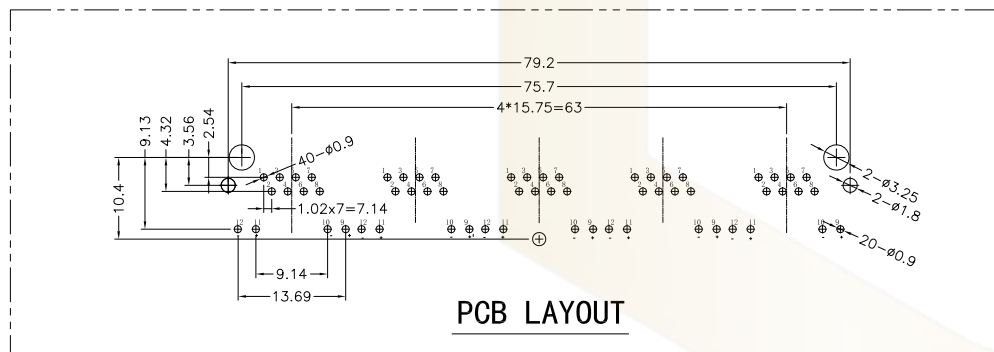

LED Specification

Standard LED Color	LED Wavelength	Forward(A)	Forward(V)
Green	568nm	20mA	1.6-2.6V
Yellow	585nm	20mA	1.6-2.6V



			GENREL TOLERANCE	制图	04	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核					
			X.X ±0.30	批准		产品名称	网络插座	版本	A
			X.XX ±0.20	比例		产品料号	HC-RJ45-5JA-5-2	单位	mm
			X.XXX ±0.10	投影		材料		页次	1/1
序号	变更内容	日期	Angle ±3.0°	投影		MATERIAL		SHEET	
No.	MODIFY CONTENT	MODIFY DATE		Projection					