

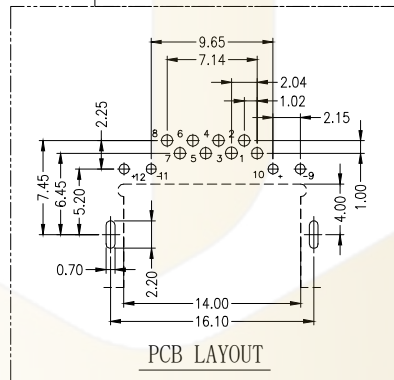





NOTES:

1. MATERIAL:
 - 1.1. HOUSING: LCP ,COLOR IS BLACK;
 - 1.2. CONTACT: COPPER ;
2. FINISH: GOLD PLATED G/Fu";
4. ELECTRICAL:
 - 4.1. VOLTAGE RATING: 125 VAC RMS;
 - 4.2. CURRENT RATING: 1.5 AMP;
 - 4.3. CONTACT RESISTANCE: 35MILLIOHMS MAX.;
 - 4.4. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz,1MIN.;
 - 4.5. INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.;
5. MECHANICAL:
 - 5.1. MATING/UNMATING FORCE: 22N MAX.;
 - 5.2. RETENTION STRENGTH: 50N MIN.;
 - 5.3. OPERATING LIFE: 750 CYCLES MIN.;
6. ENVIRONMENTAL:
 - 6.1. STORAGE TEMPERATURE RANGE: -40°C~+85°C;
 - 6.2. OPERATION TEMPERATURE RANGE: -25°C~+70°C;
- 7.SALT SPRAY TEST:8H(EXCLUDING RIVETED BENDS)



序号	名称	材料	表面	备注
3	外壳	SUS	镀镍	
2	端子	磷铜	焊料区镀锡, 接触区镀金(1u)	
1	基座	LCP	黑色	

Ordering Information

HC-RJ45 - *** * - * - * - * * * - 06

Series (系列号)	Connector Package (默认=DIP S=SMT)	Ports (1=1口 2=2口)	LED/EMI Style (1=带灯带弹 2=无灯带弹)	LED Color (1=带灯(左黄右绿) 2=带灯(左绿右黄) 3=带灯(左绿右绿) 4=带灯(左黄右黄) 5=带灯(单灯左黄) 6=带灯(单灯左绿) 7=带灯(单灯右绿) 8=带灯(单灯右黄))	Type (T=卧式 R=直插 V=立式)	产品序号
-----------------	---	----------------------------------	---	--	--------------------------------	------

		GENEERL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
		DIM	TOL	审核 CHECK		产品名称	网络插座 (沉板4.2 带灯无弹 DIP 16.3x11.1x15.2)	版本 REV.	A
		X.X	±0.30	批准 APPROVAL		产品料号	HC-RJ45-0109-1-2-1M01-06	单位 UNITS	mm
1	初版发行	X.XX	±0.20	比例 SCALE		材料		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	投影 Projection				