
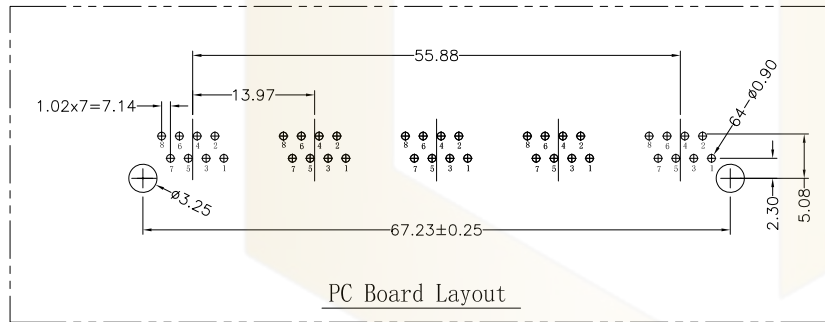


Electrical
 Current rating:1.5 AMPS
 Voltage rating:125V AC
 Insulation resistance:
 500 MEGOHMS MIN @500V DC
 Withstanding voltage:
 1000V AC RMS 50Hz OR 60Hz. 1MIN.
 Contact rating::30 MILLIOHMS MAX.
 Working temperature:-40℃~+70℃

机构特性:

1. 塑壳材质: PBT、PA46、PA66黑色
2. 圆针材质: 磷青铜, $\phi 0.46\text{mm}$
3. 圆针电镀: 镍底, 表面全部镀金
4. 外壳材质: 钢带, 厚度0.2, 镀镍
5. 可靠性: 最少750次插拔
6. 插入力: 30N
7. 相对湿度: <80%

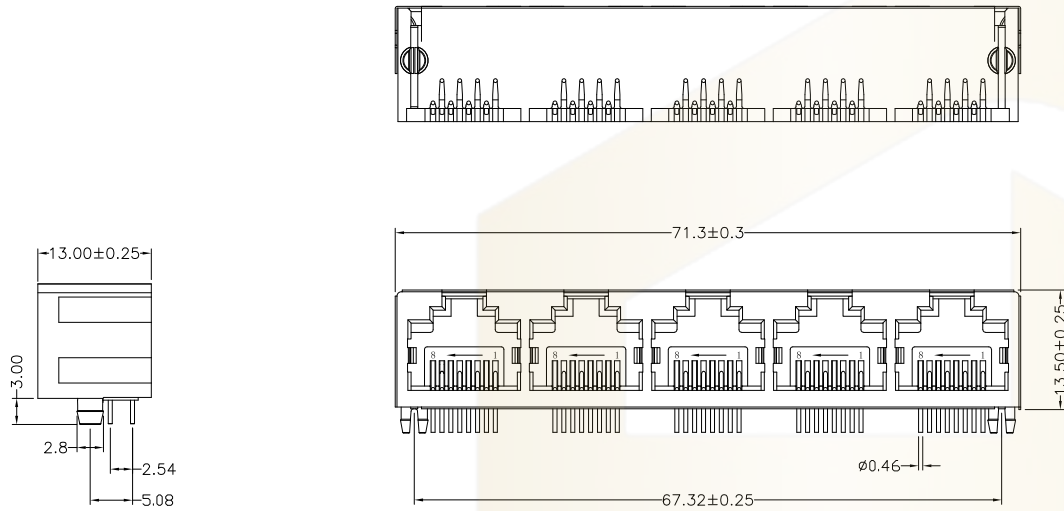

PC Board Layout

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM TOL	审核 CHECK	产品名称 TITLE		网络插座	版本 REV.	A
			X.X ±0.30	批准 APPROVAL	产品料号 PART NO.		HC-RJ45-055A-5-6	单位 UNITS	mm
			X.XX ±0.20	比例 SCALE	材料 MATERIAL			页次 SHEET	1/1
			X.XXX ±0.10	投影 Projection					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°						