




TOP VIEW




FRONT VIEW





BOTTOM VIEW



RIGHT SIDE VIEW



BACK VIEW

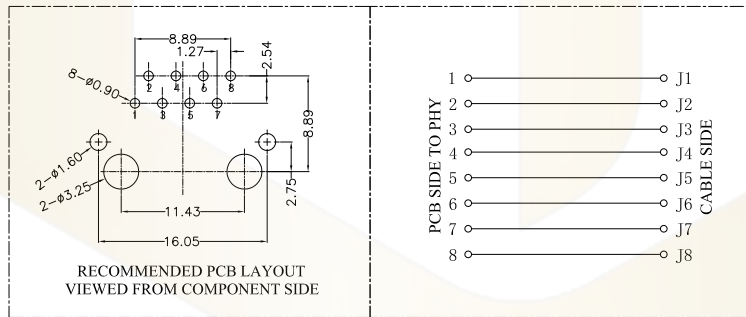

MATERIAL:
HOUSING: PBT,UL94V-0,BLACK.
TERMINALS BRACKET: PBT,UL94V-0,RED.
TERMINAL: PHOSPHOR BRONZE T=0.35MM,
6U" GOLD PLATING ON CONTACT AREA.
SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING ON ALL AREA.

MECHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40℃~+85℃.
STORAGE TEMPERATURE: -40℃~+85℃.
ALL CRITICAL DIMENSIONS WITH "±"

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.

Ordering Information

HC-RJ45 - *** * - * - * * * - * - 01

Series	Connector Package	Ports	LED/EMI Style	LED Color	Type	Contact Plating
052F	S=SMT	1:1 2:2 4:4 8:8	1:无LED 2:LED 4:LED 8:LED	1:无LED 2:LED 4:LED 8:LED	1:无LED 2:LED 4:LED 8:LED	1:无镀金 2:镀金 4:镀金 8:镀金

		GENEAL TOLERANCE	制图	01	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
		DIM TOL	审核					
		X.X ±0.30	批准		产品名称	网络插座 (立插 TAB-UP 无灯无弹)	版本	A
		X.XX ±0.20	比例		产品料号	HC-RJ45-052F-1-4-V-01	REV.	
		X.XXX ±0.10	投影		材料		UNIT	mm
序号	变更内容	日期	投影		MATERIAL		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE					SHEET	