




TOP VIEW

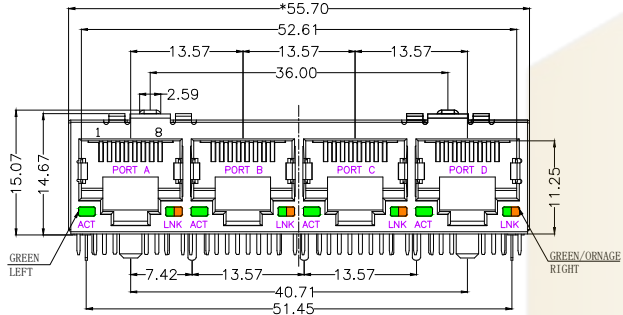


FRONT VIEW




RIGHT SIDE VIEW

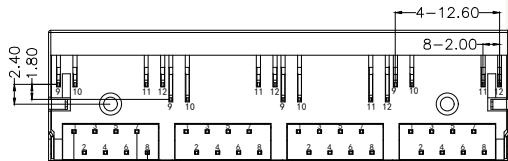

BOTTOM VIEW

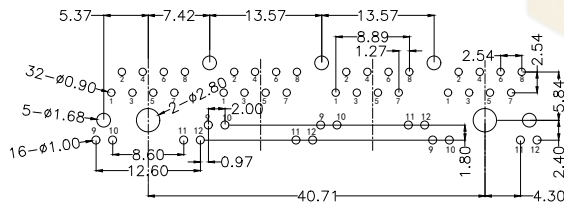


RECOMMENDED PCB LAYOUT VIEWED FROM COMPONENT SIDE

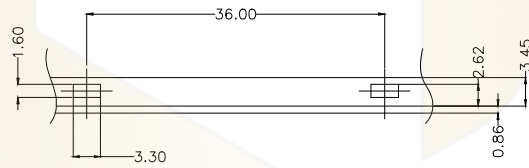

RECOMMENDED BRACKET CUTOUT


BRACKET THICKNESS



MATERIAL:
 HOUSING: PA46,UL94V-0,BLACK.
 TERMINAL: PHOSPHOR BRONZE T=0.35MM,
 3U" GOLD PLATING ON CONTACT AREA.
 SHIELD: C2680,T=0.25MM,20 MIN NICKEL PLATING
 ON ALL AREA.


MACHANICAL:
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
 INSERTION FORCE: 2.2KG.F MAX.
 RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
 OPERATING TEMPERATURE: -40°C~+85°C.
 STORAGE TEMPERATURE: -40°C~+85°C.
 ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:
 VOLTAGE: 125 VOLTS AC.
 CURRENT RATING : 1.5AMP.
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
 AFTER 500V DC FOR 1 MINUTE.
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
 INITIAL 50 MILLIOHMS MAX. AFTER
 DURABILITY TEST.

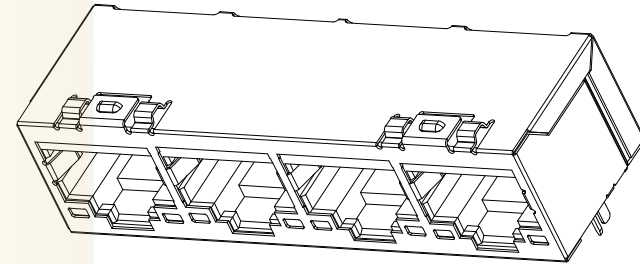

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Orange	585nm	20mA	1.7-2.2V

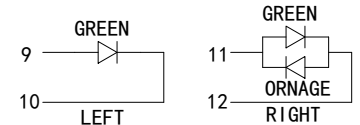

序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	GENEAL TOLERANCE	制图 DRAWING	01
1	初版发行		DIM TOL	审核 CHECK	
			X.X ±0.30	批准 APPROVAL	
			X.XX ±0.20	比例 SCALE	
			X.XXX ±0.10	投影 Projection	
			Angle ±3.0°		

深圳市华灿天禄电子有限公司
 ShenzhenhuacantianluELECTRONICS CO.,LTD

产品名称 TITLE	网络插座(卧插 带灯无弹 1X4 左绿 右绿-橙 带屏蔽)	版本 REV.	A
产品料号 PART NO.	HC-RJ45-056F-4-2-01	单位 UNITS	mm
材料 MATERIAL		页次 SHEET	1/1