



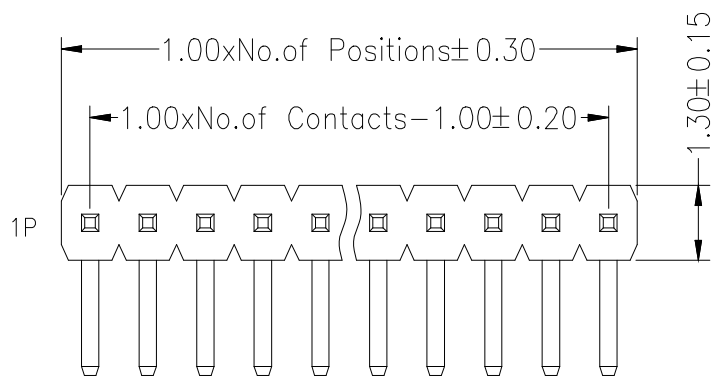

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


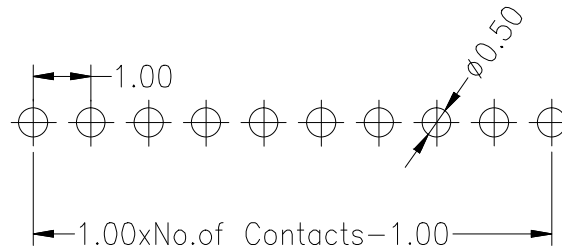


SPECIFICATIONS
Rated Current:0.75AMP
Contact Resistance:30mΩ Max
Withstand Voltage:500V AC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
260℃±5℃, 10s(PA6T&LCP insulator)

Dimension antitheses list

ITEM	PA	PB	PC	L
Standard	1.80	1.50	2.00	3.30
Alternate				

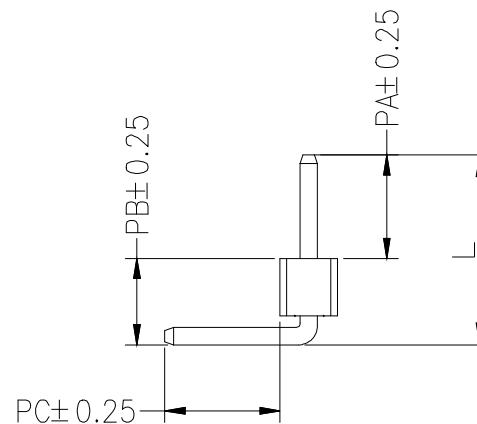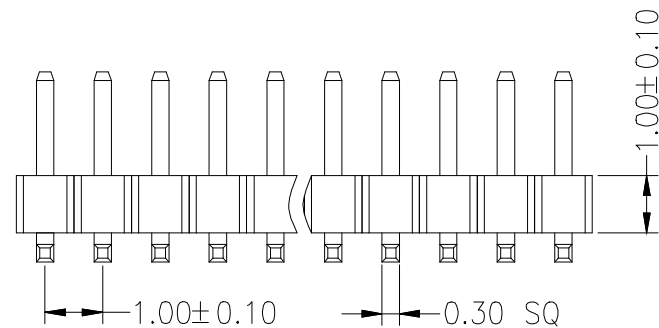

Ordering Information

PZ 100 - * - N - W - * - **

No.of Rows
1=Single Row
2=Dual Row

No.of Pins
1-50Pin

Type
Z=直针
H=弯针
S=立轴
RS=预插

Length
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE	制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL	产品名称 TITLE	1.00 单排 弯排针(塑高1.0)	版 本 REV.	A	
1	初版发行		X.XX ±0.20	比 例 SCALE	产品料号 PART NO.	PZ100-1-N-W-1.0-XX(L3.3)	单 位 UNITS	mm	
		X.XXX ±0.10							
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1