

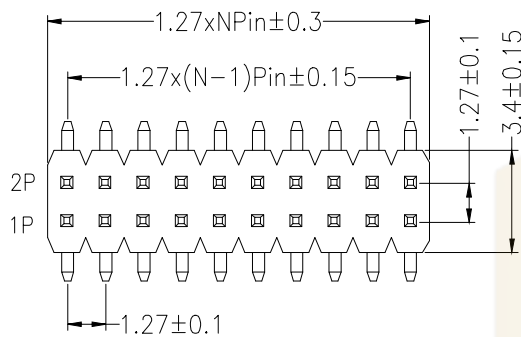
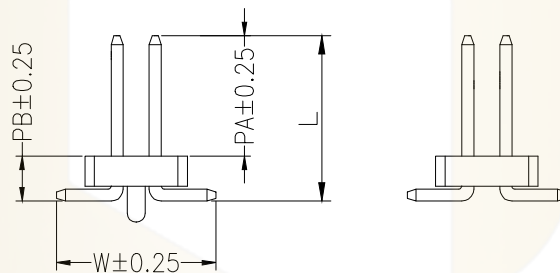


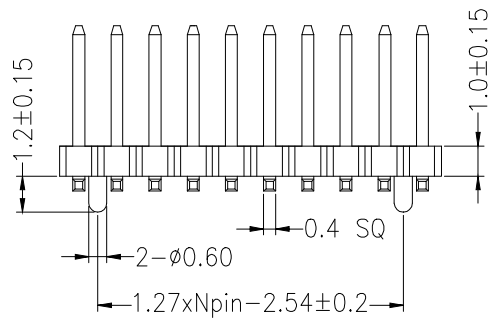

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

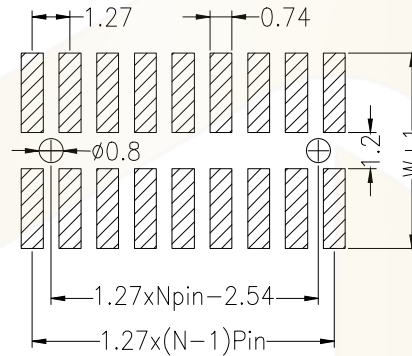

P = With Post

默认= W/O Post

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Pitch	塑高变量 (mm)
1.27mm	0.85
	1.0
	1.5
	1.7
	2.0
	2.5

Dimension antitheses list

ITEM	PA	PB	W	L
Standard	3.50	1.50	5.50	5.00

Ordering Information

PZ 127 - * - N - * - * - ** - P

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2=50Pin	Type 2=Pin 3=Socket 4=Connector	Length (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Post (mm)
--	-----------------------	--	----------------	--	--------------



GENERAL TOLERANCE			制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
DIM		TOL	审 核 CHECK		产品名称 TITLE	1.27 双排 排针 贴片(塑高1.0)	版本 REV.	A
X.X		±0.30	批 准 APPROVAL		产品料号 PART NO.	PZ127-2-N-S-1.0-XX(L5.3)	单 位 UNITS	mm
X.XX		±0.20	比 例 SCALE		材 料 MATERIAL		页 次 SHEET	1/1
X.XXX		±0.10	投 影 Projection					
Angle	±3.0°							
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE						