
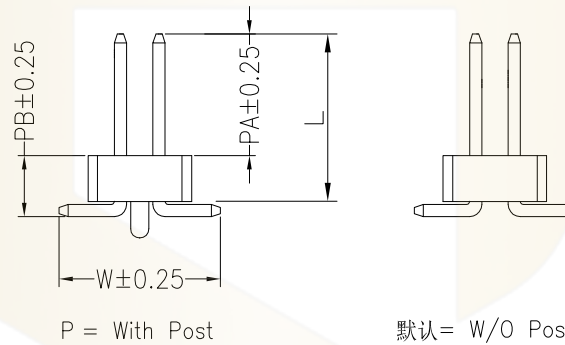
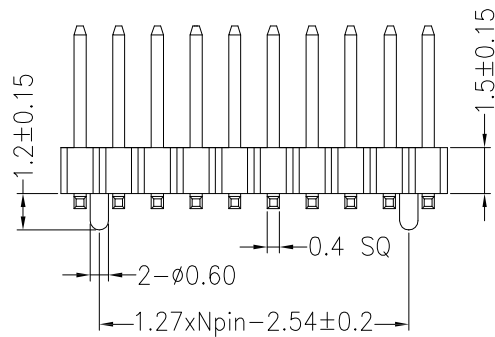
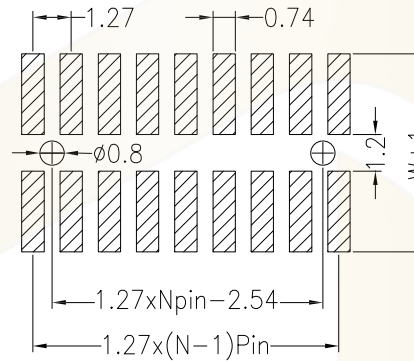


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

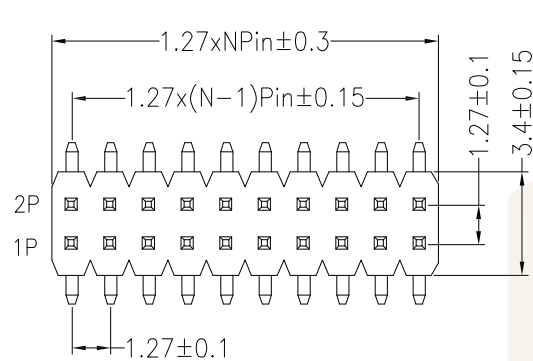

默认= W/O Post

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 10 seconds)

Pitch	塑高变量 (mm)
1.27mm	0.85
	1.0
	1.5
	1.7
	2.0
	2.5

Dimension antitheses list

ITEM	PA	PB	W	L
Standard	3.80	2.00	5.50	5.80

Ordering Information

PZ 127 - * - N - * - * - ** - P

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2=50Pin

Type
2=H
3=V
4=V
5=V

Length
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

Post
(mm)

			GENERAL TOLERANCE		制 图 DRAWING		 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD					
			DIM TOL		审 核 CHECK							
			X.X ±0.30		批 准 APPROVAL		产品名称 TITLE		1.27 双排 排针 贴片(塑高1.5)		版 本 REV.	A
			X.XX ±0.20		比 例 SCALE		产品料号 PART NO.		PZ127-2-N-S-1.5-XX(L5.8)		单 位 UNITS	mm
1	初版发行		X.XXX ±0.10				材 料 MATERIAL		页 次 SHEET		1/1	
Angle ±3.0°												
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE										