

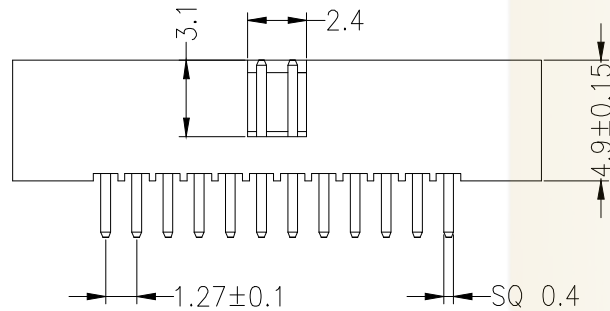
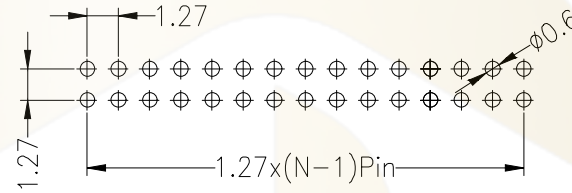


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

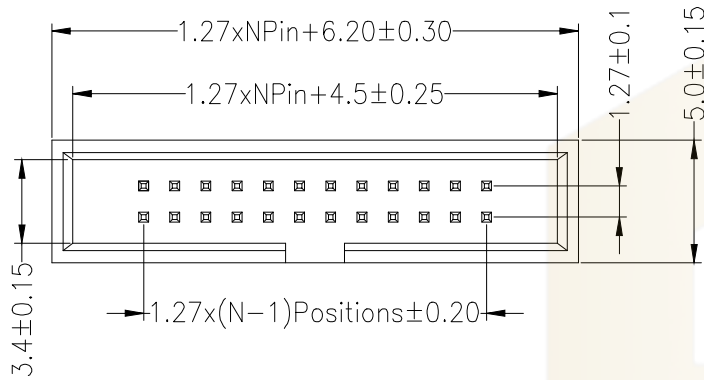

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Ordering Information

HC-JN 127 - * - N - Z - * - **

No. of Rows
1=Single Row
2=Dual Row
No. of Pins
10-100Pin
Type
2=直针
4=弯针
5=立针
Length
(mm)
Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制 图 DRAWING		 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD					
			DIM TOL		审 核 CHECK							
			X.X ±0.30		批 准 APPROVAL		产品名称 TITLE		简牛1.27 双排 直针		版 本 REV.	A
			X.XX ±0.20		比 例 SCALE		产品料号 PART NO.		HC-JN127-2-N-Z-4.9-XX		单 位 UNITS	mm
			X.XXX ±0.10				材料 MATERIAL		页 次 SHEET		1/1	
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°		投 影 Projection							