


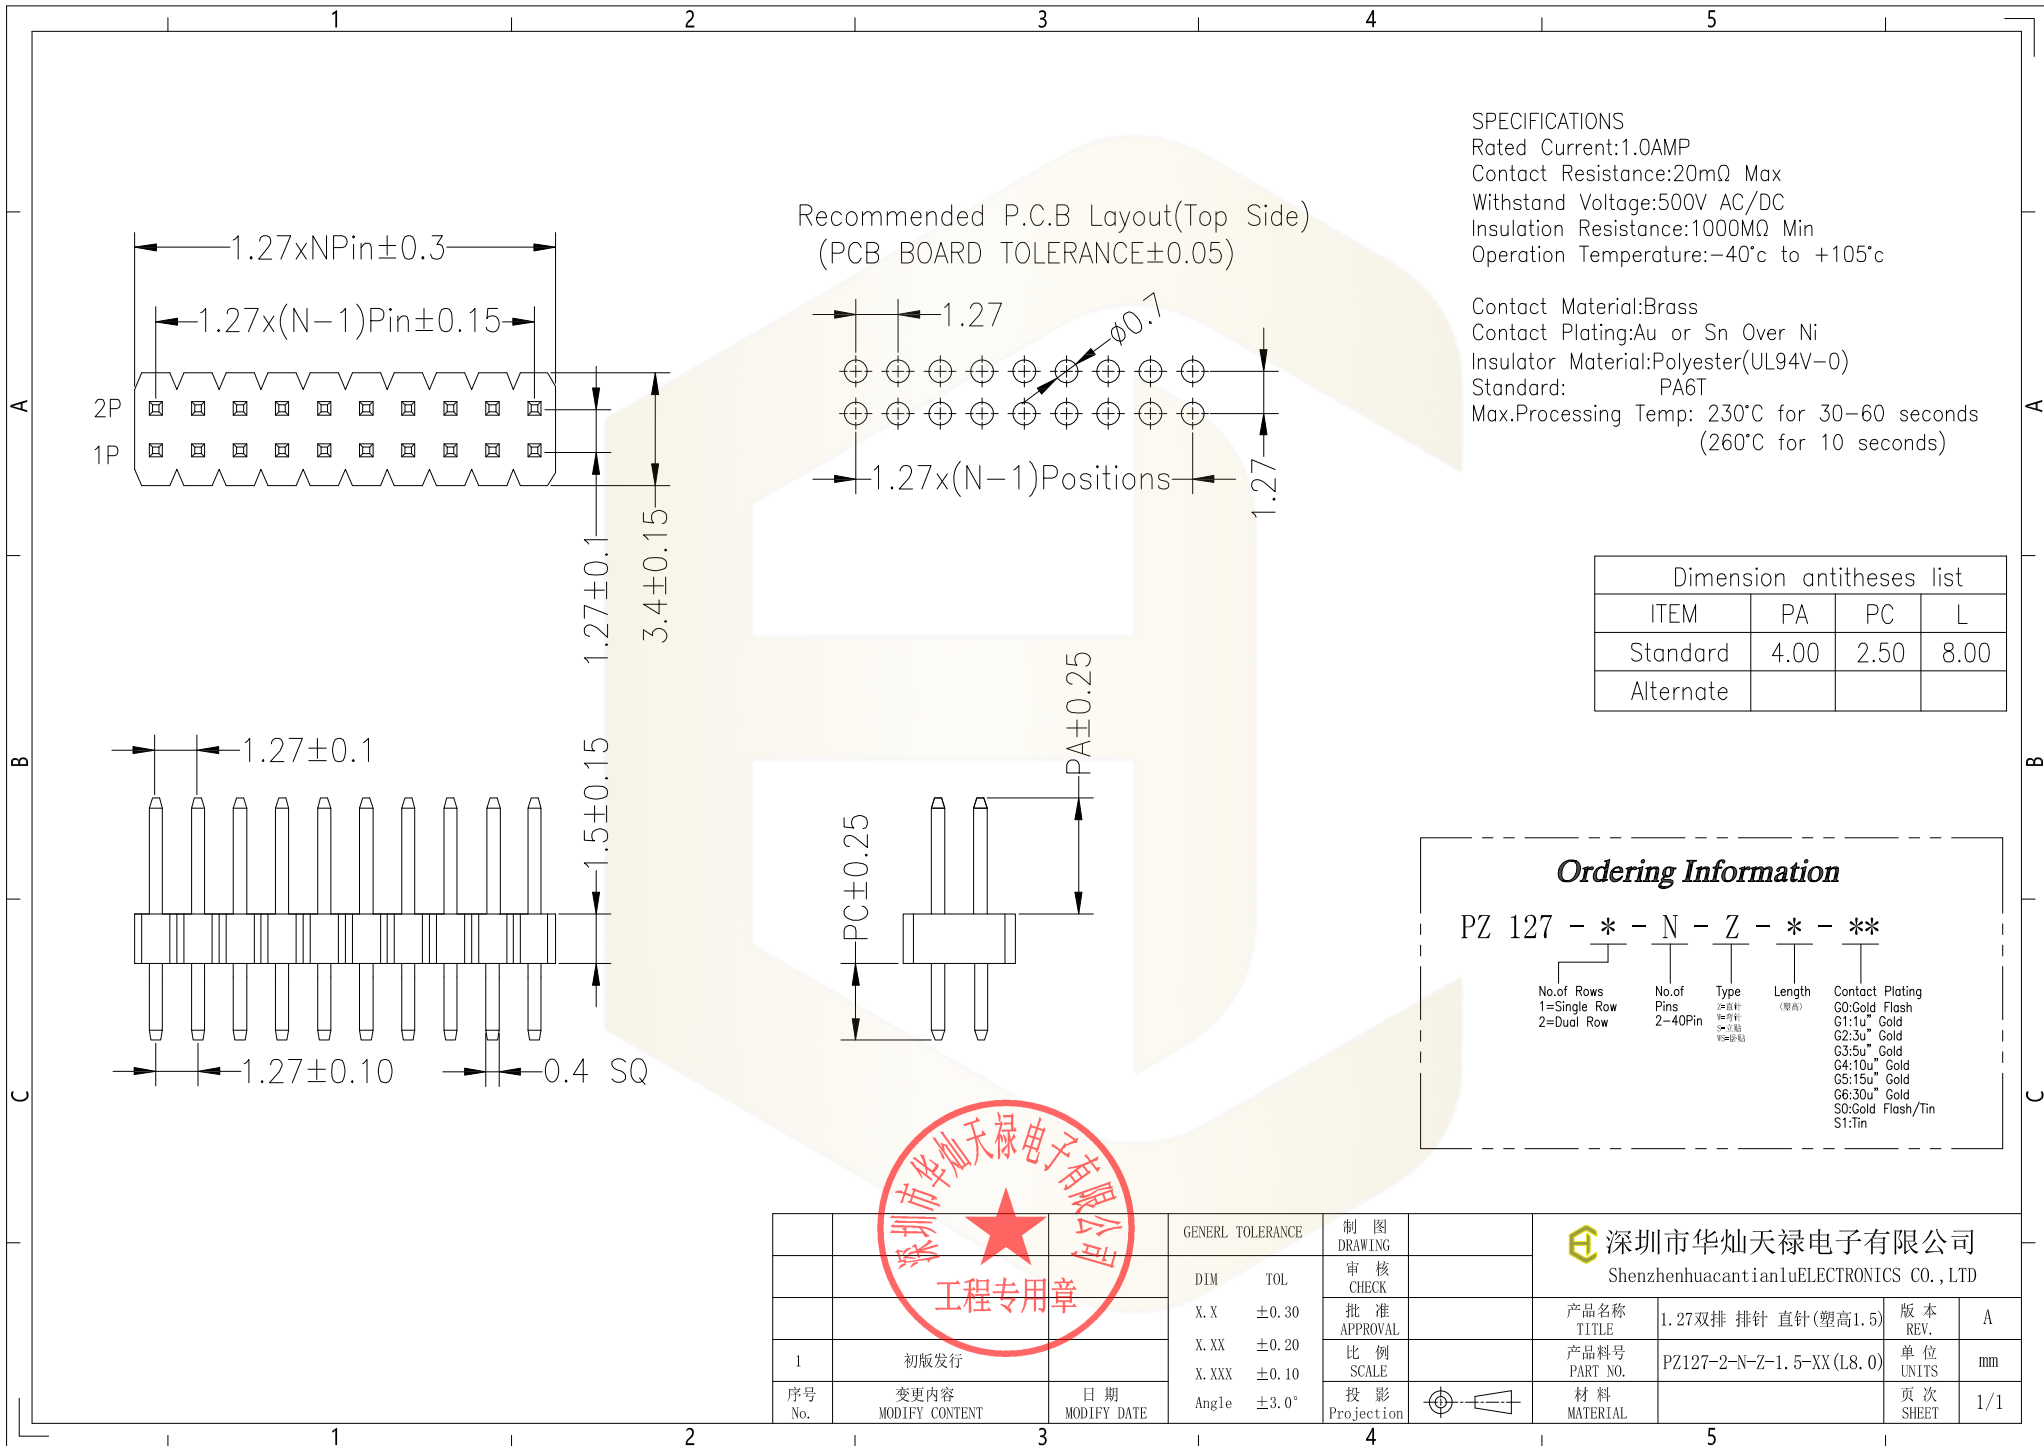

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c
Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list			
ITEM	PA	PC	L
Standard	4.00	2.50	8.00
Alternate			

Ordering Information

PZ 127 - * - N - Z - * - **

No.of Rows
1=Single Row
2=Dual Row

No.of Pins
2-40Pin

Type
(=直针)
(=弯针)
(=带插针)

Length
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制 图 DRAWING		 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD						
			DIM	TOL	审 核 CHECK								
					X.X	±0.30	批 准 APPROVAL		产品名称 TITLE	1.27双排 排针 直针(塑高1.5)		版 本 REV.	A
			1	初版发行		X.XX	±0.20	比 例 SCALE		产品料号 PART NO.	PZ127-2-N-Z-1.5-XX(L8.0)		单 位 UNITS
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE		X.XXX	±0.10	投 影 Projection		材 料 MATERIAL			页 次 SHEET	1/1	
			Angle	±3.0°									