

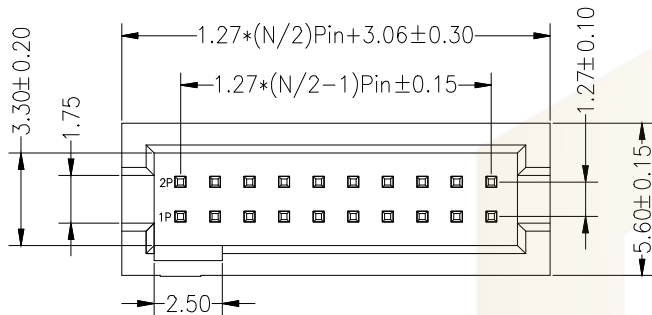
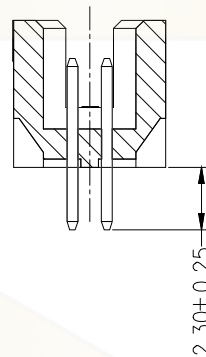


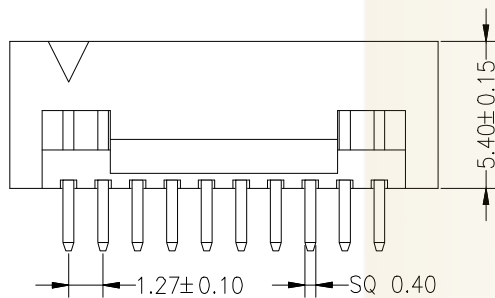

Recommended P.C.B Layout(Top Side)
PCB BOARD TOLERANCE±0.05

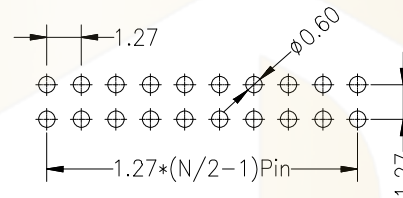

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩMax

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩMin

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Max.Processing Temp:

(PA6T/LCP/PA9T)260°C±5°C For 5~10 Second

Ordering Information

HC-JN 127 - * - N - Z - * - **

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
10-100Pin

Type
Z=直针
K=弯针
WS=弯插

Length
(Plastic)
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin



			GENERAL TOLERANCE		制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD					
			DIM	TOL	审 核 CHECK						
				X. X	±0.30	批 准 APPROVAL	产品名称 TITLE	简牛1.27 双排 直针	版 本 REV.	A	
			1	初版发行	X. XX	±0.20	比 例 SCALE	产品料号 PART NO.	HC-JN127-2-N-Z-5.4-XX	单 位 UNITS	mm
			序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	X. XXX	±0.10	投 影 Projection	材料 MATERIAL	页 次 SHEET	1/1
			Angle	±3.0°							