
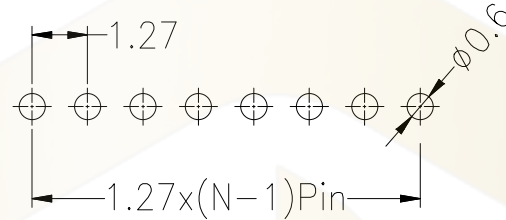




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

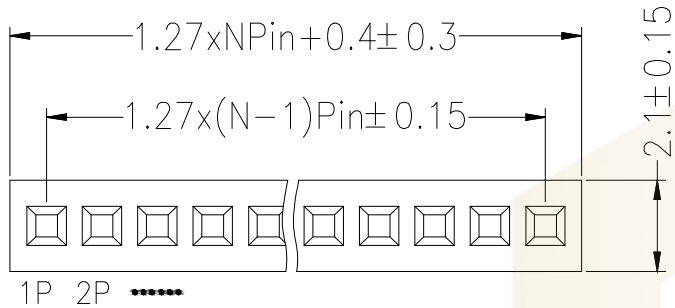

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 10 seconds)

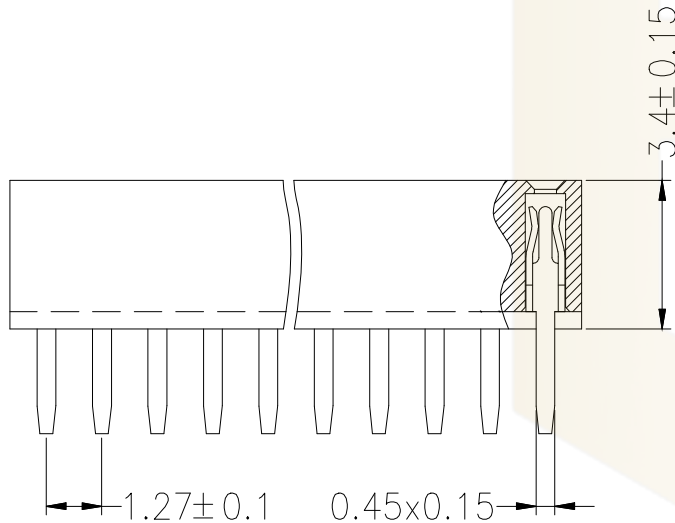

Ordering Information

PM 127 - * - N - Z - * - **

No.of Rows
1=Single Row
2=Dual Row
No.of Pins
2-50Pin
Type
Z-直针
H-弯针
S-立针
WS-带胶
Length
(Pin高)
(塑高)
Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD					
			DIM	TOL	审 核 CHECK		产品名称 TITLE		1. 27单排 排母 直针 (塑高3.4)	版 本 REV.	A
			X. X	±0.30	批 准 APPROVAL						
			1	初版发行	X. XX	±0.20	比 例 SCALE	产品料号 PART NO.	PM127-1-N-Z-3.4-XX (L5.8)	单 位 UNITS	mm
					X. XXX	±0.10					
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°	投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/1		