

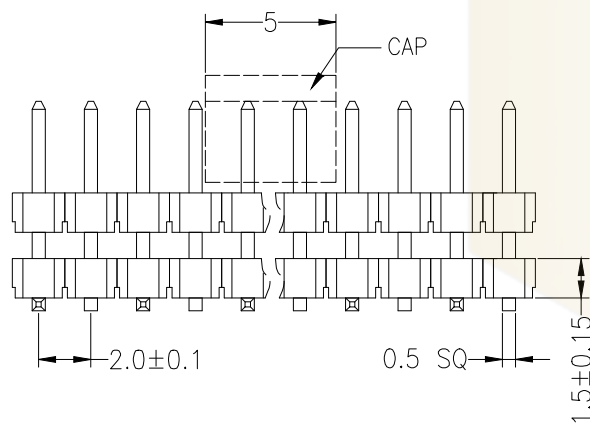
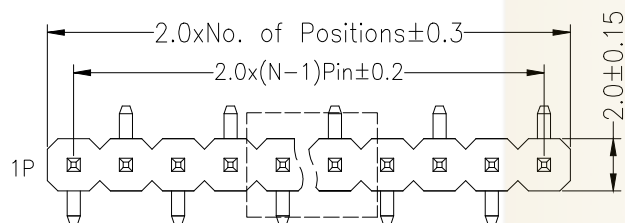
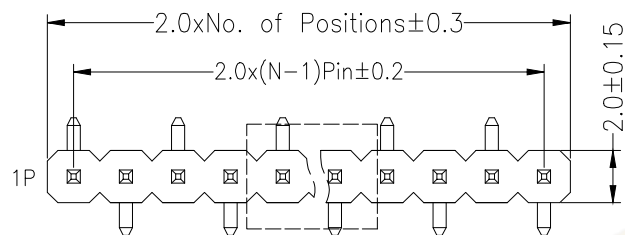
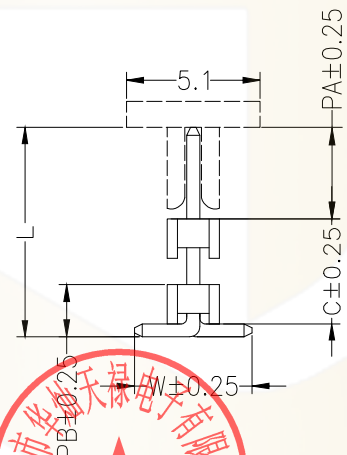


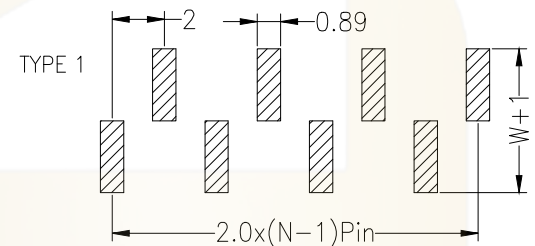

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

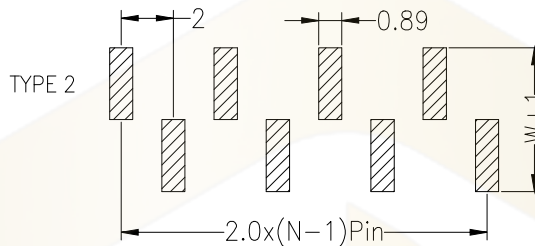

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

Dimension antitheses list					
ITEM	PA	PB	C	W	L
Standard	3.90	2.00	4.00	4.50	9.90
Alternate					

Ordering Information

PZ 200 - * - N - S - * - ** - * - * - DP								
No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2-40Pin	Type Z=直针 B=弯针 S=立轴 WS=跨轴	Length (产品长度)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	R=Reel +Cap 编带+盖包装	1=TYPE 1 (首针在上) 2=TYPE 2 (首针在下)	Double Plastic (双塑)	

			深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			产品名称 TITLE	2.00 单排 排针 双塑 贴片	版本 REV.	A
			产品料号 PART NO.	PZ200-1-N-S-C4.0-XX-X-DP(L9.9)	单位 UNITS	mm
			材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	GENERAL TOLERANCE	制图 DRAWING		
			DIM TOL	审核 CHECK		
			X.X ±0.30	批准 APPROVAL		
			X.XX ±0.20	比例 SCALE		
			X.XXX ±0.10	投影 Projection		
			Angle ±3.0°			
1	初版发行					