

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Current Rating:1.0AMP

Contact Resistance:10m Ω Max

Dielectric Strength:Min 1000V RMS

Operation Temperature:-40°C to +105°C





Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PPS

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

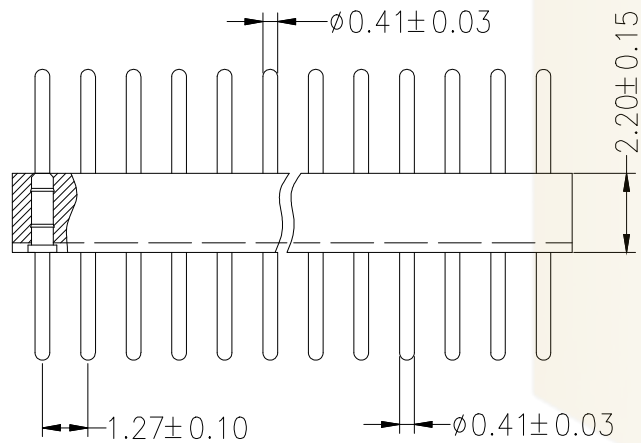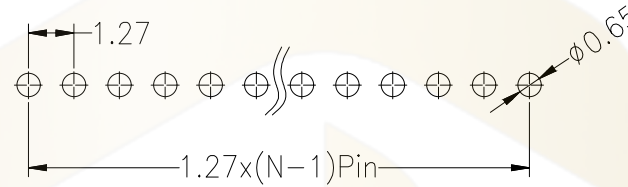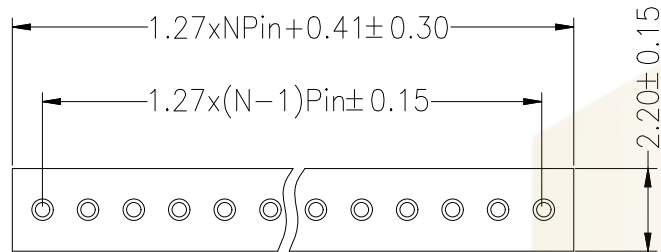

Ordering Information

PZ 127 - * - N - Z - * - ** - C

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2-50Pin

Type
2=直针
3=弯针
5=立轴

Length
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

Round Pin
(圆针)

	GENERAL TOLERANCE		制图	 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DRAWING				
			审核	产品名称 TITLE			
			CHECK				
			批准	1.27 单排 直针 塑高2.2 反装 (上针/下针0.4)			
			APPROVAL				
			比例	产品料号 PART NO.			
			SCALE				
1	初版发行		投影	PZ127-1-N-Z-2.2-XX-C(L8.1)			
			Angle				
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	材料	单位 UNITS	页次 SHEET		
			MATERIAL			1/1	