

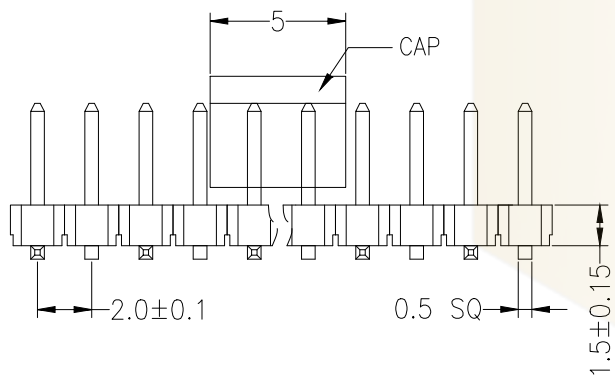
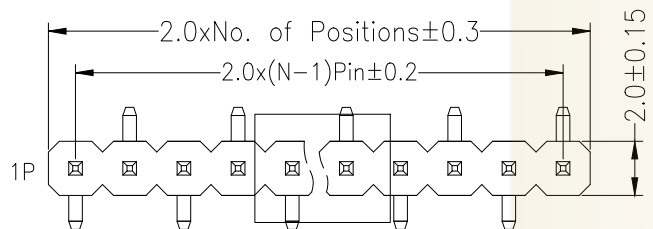
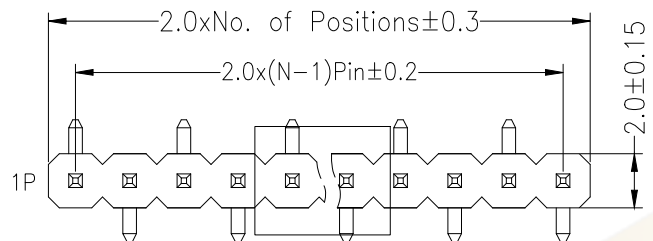
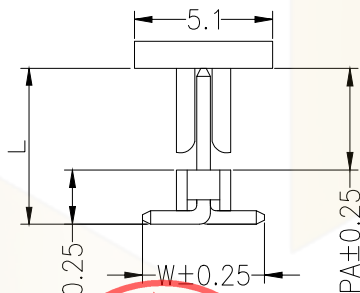


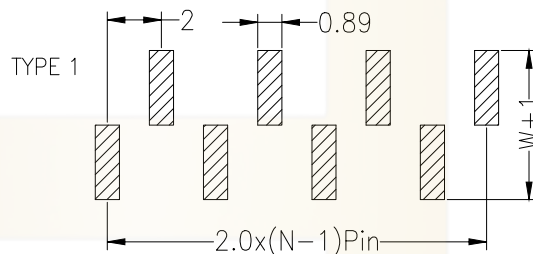

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

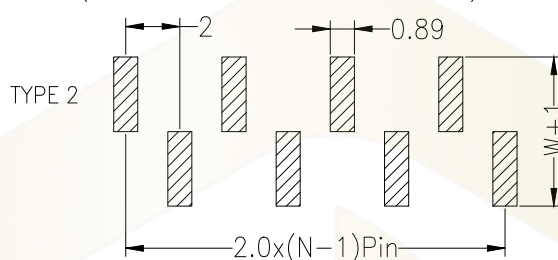

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

Dimension antitheses list

ITEM	PA	PB	W	L
Standard	4.00	2.00	4.50	6.00
Alternate				

Ordering Information

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2-40Pin	Type 2=直针 3=弯针 4=带脚	Length (产品长度)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	1=TYPE 1 (直针在上方) 2=TYPE 2 (弯针在下方)
PZ 200	*	N	S	*	**

深圳市华灿天禄电子有限公司 工程专用章			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD					
					DIM	TOL	审 核 CHECK					
					X.X	±0.30	批 准 APPROVAL		产品名称 TITLE		2.00 单排 排针 贴片(塑高1.5)	版 本 REV.
		X.XX	±0.20	比 例 SCALE		产品料号 PART NO.		PZ200-1-N-S-1.5-XX-X(L6.0)	单 位 UNITS	mm		
1	初版发行		X.XXX	±0.10	投 影 Projection				材 料 MATERIAL		页 次 SHEET	1/1