

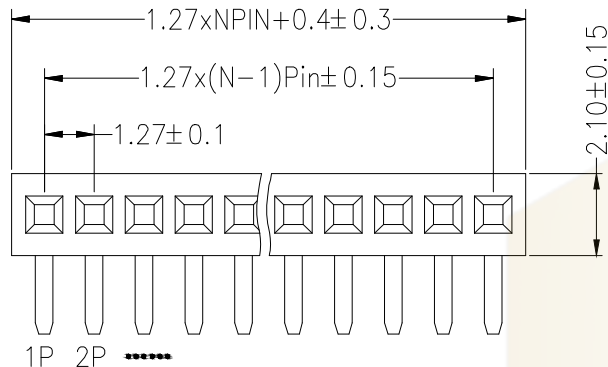
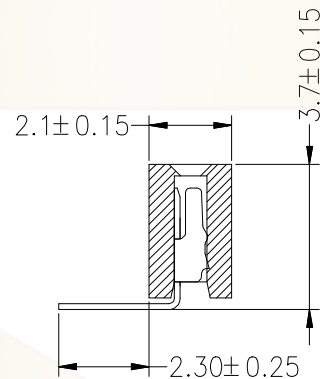


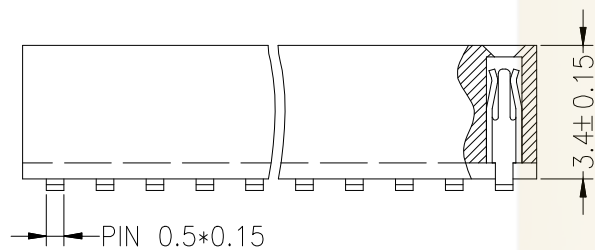

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

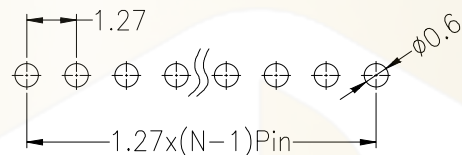

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩMax

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩMin

Operation Temperature:-40℃ to +105℃

Contact Material:Phosphor Bronze

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Soldering temperature:260℃± 5℃ 5S

Ordering Information

PM 127 - * - N - W - * - **

No.of Rows
1=Single Row
2=Dual Row

No.of Pins
2-40Pin

Type
Z=直针
H=弯针
S=立轴
WS=弯轴

Length
(Plastic)
(塑高)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin



			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核 CHECK	产品名称 TITLE	1.27单排 排母 弯针(塑高3.4)	版本 REV.	A
			X.X ±0.30	批准 APPROVAL	产品料号 PART NO.	PM127-1-N-W-3.4-XX(L3.7)	单位 UNITS	mm
			X.XX ±0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
			X.XXX ±0.10	投影 Projection				
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°					