

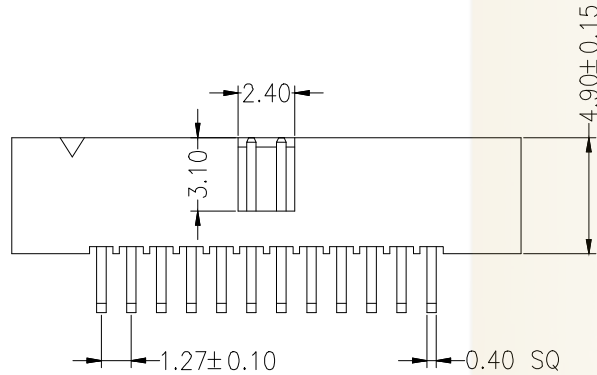
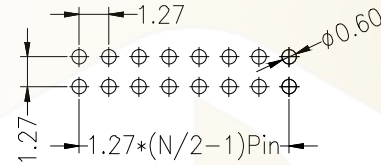


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

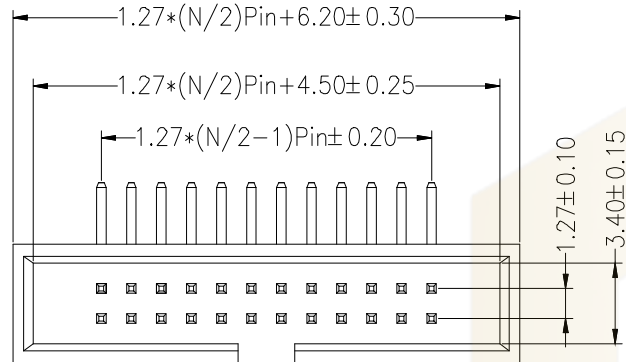

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20mΩMax
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩMin
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
245°C±5°C, 10s(PBT insulator)
260°C±5°C, 10s(PA6T&PA9T&LCP insulator)

Ordering Information

HC-JN 127 - * - N - W - * - **

No. of Rows
1=Single Row
2=Dual Row
No. of Pins
10-100Pin
Type
Z=直针
W=弯针
NS=带帽
Length
(Plastic)
(mm)
Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin



			GENERAL TOLERANCE		制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审核 CHECK	产品名称 TITLE	简牛1.27 双排 弯针	版本 REV.	A
			X. X	±0.30	批准 APPROVAL	产品料号 PART NO.	HC-JN127-2-N-W-4.9-XX	单位 UNITS	mm
			X. XX	±0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
			X. XXX	±0.10	投影 Projection				
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°					