
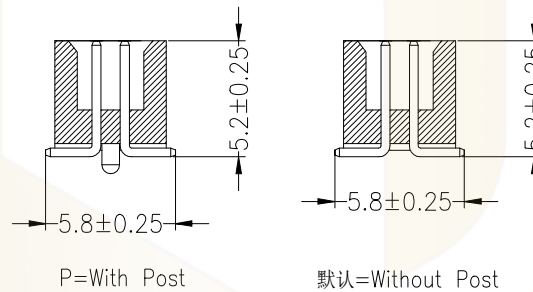


Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

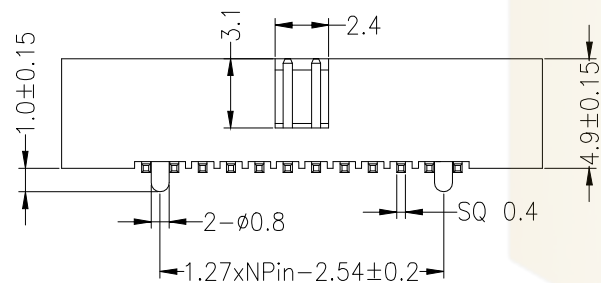

HC-JN 127 - * - N - S - * - ** - P

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
10-100Pin

Type
2-直插
3-贴片
5-SMD
6D=通孔

Length
(Plastic)
(塑壳)

Contact
G0:Gold Flash
G1:1.5u Gold
G2:2u Gold
G3:3u Gold
G5:5u Gold
S0:Gold Flash/Tin
S1:Tin

Plating
(鍍料)

With Post
(帶柱)

			GENERAL TOLERANCE		制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM	TOL	审 核 CHECK					
			X.X	±0.30	批 准 APPROVAL	产品名称 TITLE	简牛1.27 双排 贴片	版 本 REV.	A	
1	初版发行		X.XX	±0.20	比 例 SCALE	产品料号 PART NO.	HC-JN127-2-N-S-4.9-XX	单 位 UNITS	mm	
			X.XXX	±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°						