

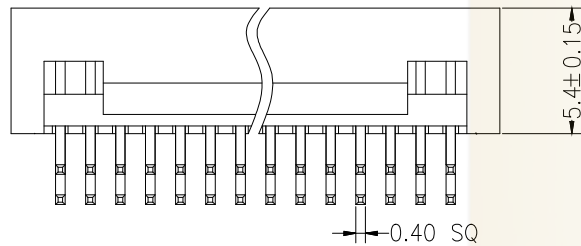
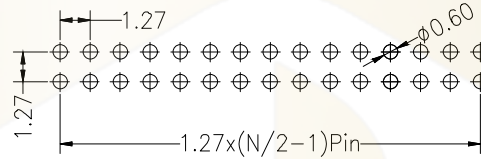


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

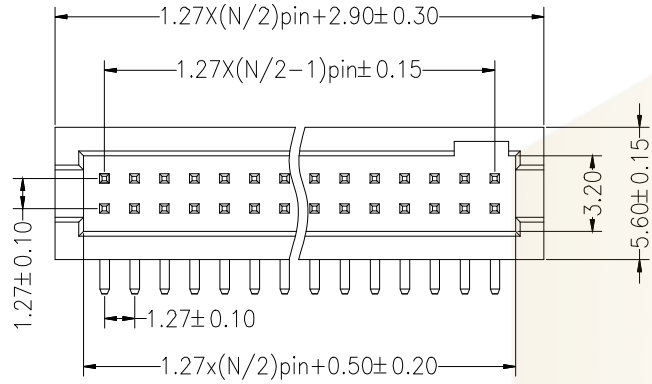

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
245° C $\pm 5^\circ$ C, 10s(PBT insulator)
260° C $\pm 5^\circ$ C, 10s(PA6T&PA9T&LCP insulator)

Ordering Information

HC-JN 127 - * - N - W - * - **

No. of Rows
1=Single Row
2=Dual Row
No. of Pins
10-100Pin
Type
Z=直针
W=弯针
NS=带插
Length
(Plastic)
(mm)
Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM	TOL	审 核 CHECK					
			X. X	±0.30	批 准 APPROVAL		产品名称 TITLE	简牛1.27 双排 弯针	版 本 REV.	A
1	初版发行		X. XX	±0.20	比 例 SCALE		产品料号 PART NO.	HC-JN127-2-N-W-5.4-XX	单 位 UNITS	mm
			X. XXX	±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°						