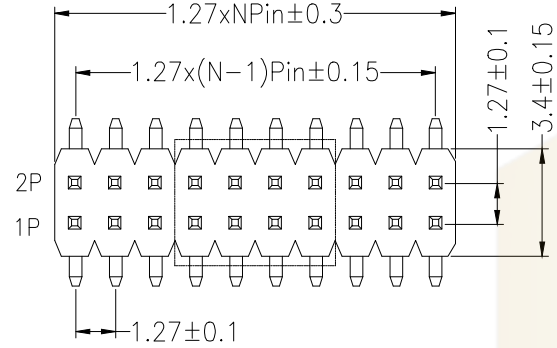

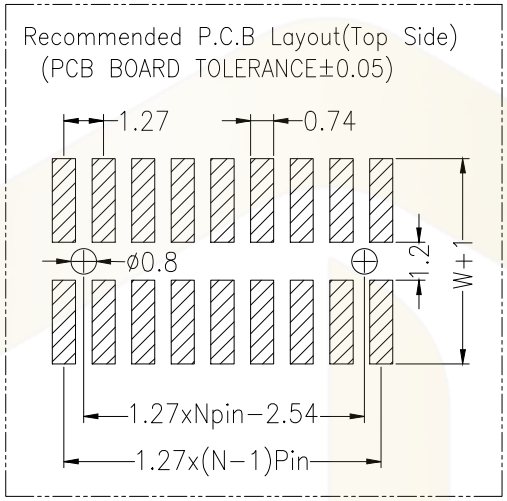

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

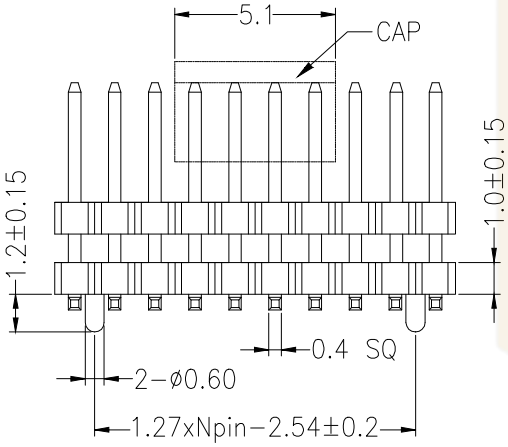

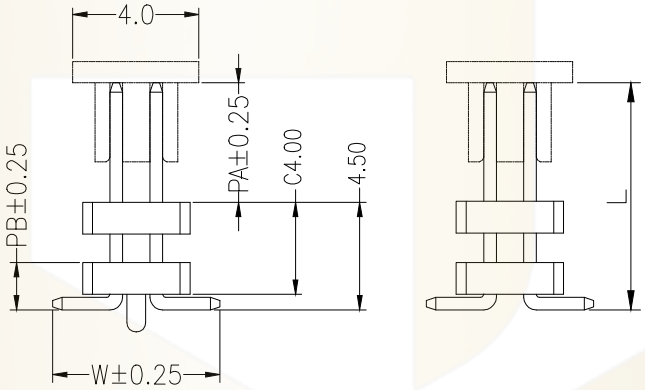

P = With Post　　默认 = W/O Post

Dimension antitheses list			
ITEM	PA	PB	W
Standard	4.00	1.50	5.50
Alternate			

Ordering Information

PZ 127 - * - N - S - C* - ** - DP

- * : No.of Rows 1=Single Row 2=Dual Row
- N : No.of Pins 2-40Pin
- S : Type Z=直针 W=弯针 S=立贴 WS=卧贴
- C* : (双塑间距)
- ** : Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
- DP : Double Plastic (双塑)

			GENERL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	1.27双排 双塑 排针 贴片	版 本 REV.	A
			X.XX ±0.20	比 例 SCALE		产品料号 PART NO.	PZ127-2-N-S-C4.0-XX-DP(L8.5)	单 位 UNITS	mm
1	初版发行		X.XXX ±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°						

深圳市华灿天禄电子有限公司 工程专用章