
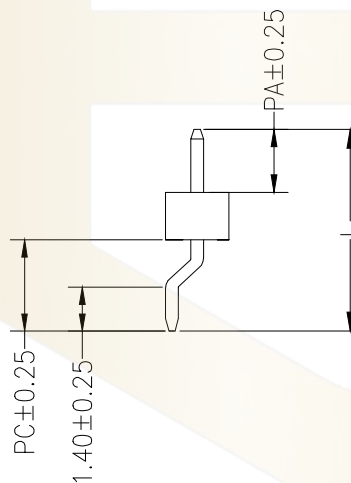
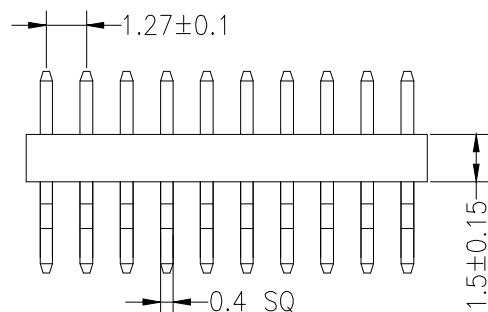


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

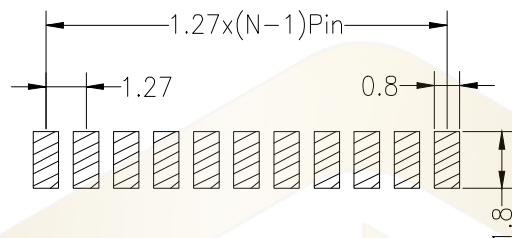

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list

ITEM	PA	PC	L
Standard	3.90	3.10	8.50
Alternate			

Ordering Information

PZ 127 - * - N - WS - * - **

No. of Rows
1=Single Row
2=Dual Row
No. of Pins
2-50Pin
Type
W=弯针
S=立脚
W=弯脚
Length
(mm)
Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制 图	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审 核				
			X. X	±0.30	批 准	产品名称	1.27单排 排针 卧贴 (塑高1.5)	版本	A
			X. XX	±0.20	APPROVAL	TITLE		REV.	
			X. XXX	±0.10	比 例	产品料号	PZ127-1-N-WS-1.5-XX(L8.5)	单 位	mm
			Angle	±3.0°	SCALE	PART NO.		UNITS	
序号	变更内容	日期	投影		投 影	材料		页 次	1/1
No.	MODIFY CONTENT	MODIFY DATE	Projection		Projection	MATERIAL		SHEET	