

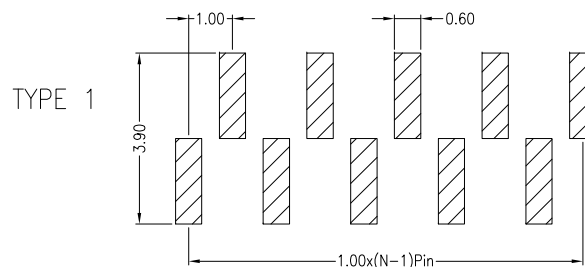


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

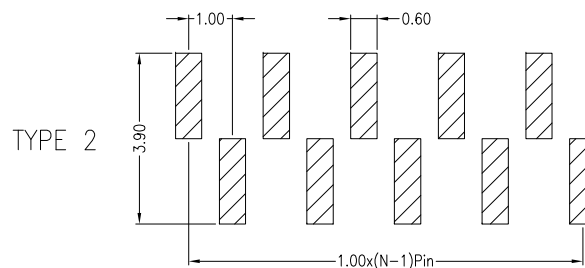

SPECIFICATIONS

Rated Current:0.75AMP

Contact Resistance:30mΩ Max

Withstand Voltage:500V AC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

260° C±5° C, 10s(PA6T&LCP insulator)

Ordering Information

PM 100 - * - N - * - * - ** - *						
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2~50Pin	Type 2=HIT 3=HIT 4=HIT 5=HIT 6=HIT	Length (単位)	Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Plating Flash Gold Gold Gold Gold Gold Gold Flash/Tin	1=TYPE 1 2=TYPE 2

			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审 核 CHECK		产品名称 TITLE	1.00 单排 排母 贴片 塑高2.0	版 本 REV.	A
			X. X	±0.30	批 准 APPROVAL		产品料号 PART NO.	PM100-1-N-S-2.0-XX-X (1,2,3)	单 位 UNITS	mm
			X. XX	±0.20	比 例 SCALE		材料 MATERIAL		页 次 SHEET	1/1
1 序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	X. XXX	±0.10	投 影 Projection					
			Angle	±3.0°						