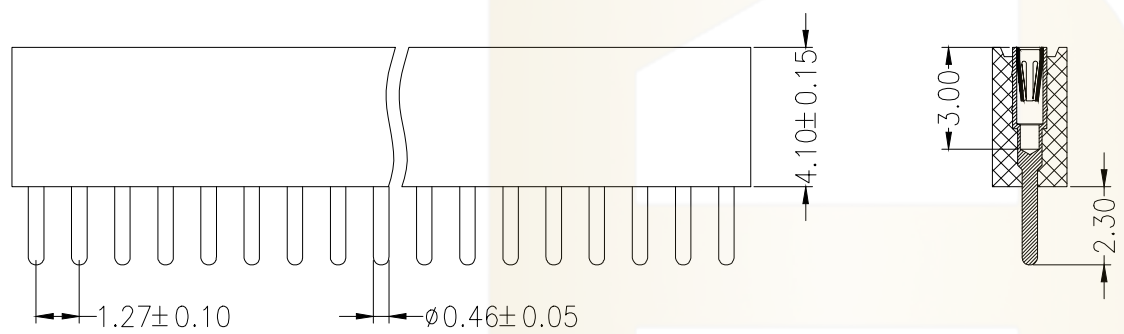
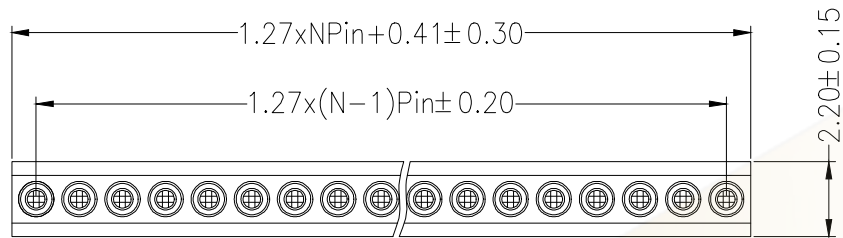


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS
Current Rating:1.0AMP
Contact Resistance:10mΩ Max
Dielectric Strength:Min 500V RMS
Mating Pin:Ø0.38 to Ø0.50mm
Forces:(polished steel gauge Ø0.41mm)
Operation Temperature:-40°C to +105°C

Sleeve:Brass
Contact Plating:Au Over Ni
Contact Clip(6 finger):BeCu
Insulator Material:Polyester(UL94V-0)
Standard: PPS
Soldering Temperature: 260°C±5° 5S

Ordering Information

PM 127 - * - N - W - * - ** - C

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 01-40Pin	Type Z=直针 B=带针 S=弯针 R=带脚	Length (产品长度)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Round Pin (圆针)
---	-------------------------	--------------------------------------	------------------	--	-------------------

GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
DIM	TOL	审核	产品名称 TITLE	1.27单排 圆直针 L6.4	版本 REV.	A
X. X	±0.30	批准	产品料号 PART NO.	PM127-1-N-Z-4.1-XX-C	单位 UNITS	mm
X. XX	±0.20	比例	材料		页次 SHEET	1/1
X. XXX	±0.10	投影				
Angle	±3.0°	Projection				