
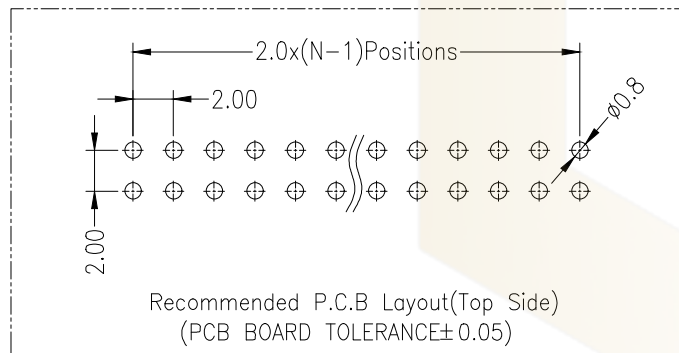

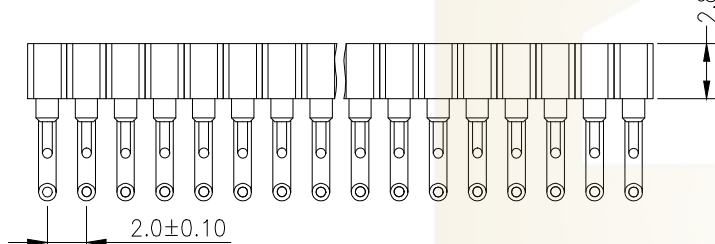


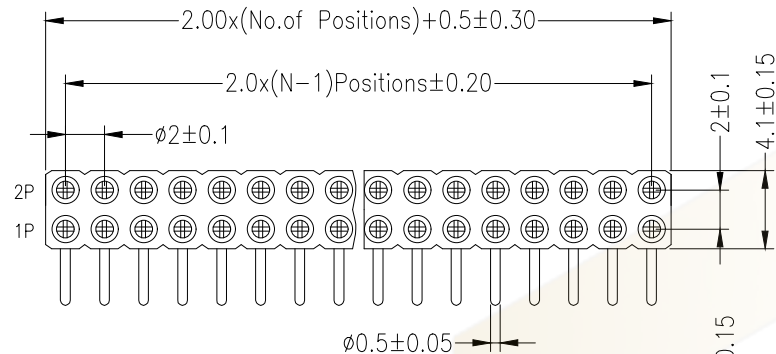

Materials

Pin (outer sleeve) :Brass,machined, CuZn38Pb2

Clip(contact 4 finger) :Beryllium copper,heat treated

Plating(outer sleeve) :

Tin plated : 1.25u"m/50u"nickel,5um/200u"Tin

Plating clip(contact):

1.25um/50 u"nickel,gold or tin plating

Insulator body(black) : Glass filled thermoplastic

polyester UL94V-0 electrical

Current rating : 3 Amps/contact max.

Contact resistance : 10mΩ /contact

Insulation resistance : 1000M at V=100V

Operating voltage : 60 AC/DC

Ordering Information

PM 200							-	*	-	N	-	W	-	*	-	**	-	C
No. of Rows 1=Single Row 2=Dual Row		No. of Pins 02-40Pin		Type (01-02) 01: 02-40Pin 02: 02-40Pin 03: 02-40Pin	Length (00-01)	Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Plating Flash	Round Pin (00-01)										

GENERAL TOLERANCE			制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
DIM	TOL	审核 CHECK	批准 APPROVAL	产品名称 TITLE	2.0 双排 圆针 弯排母 塑高2.8	版本 REV.
X.X	±0.30			产品料号 PART NO.	PM200-2-N-W-2.8-XX-C	单位 UNITS
X.XX	±0.20			材料 MATERIAL		页次 SHEET
X.XXX	±0.10					1/1
Angle	±3.0°					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	投影 Projection			
1	初版发行					