

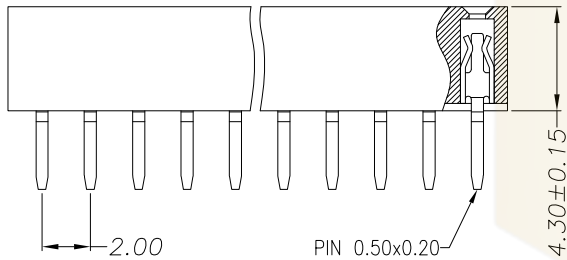
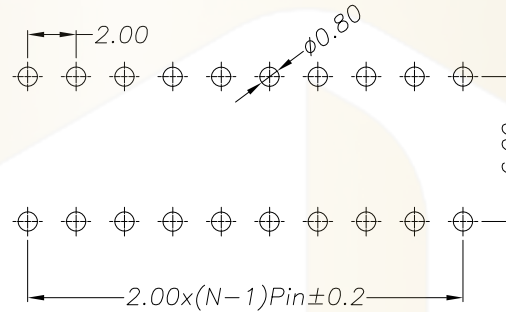


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

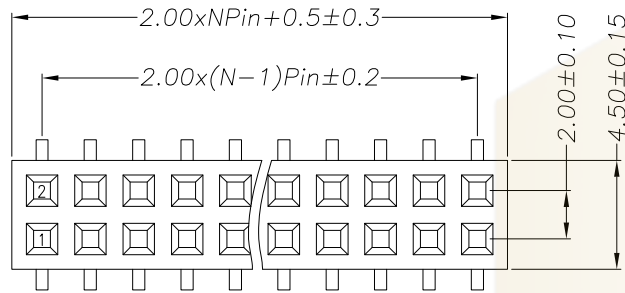

SPECIFICATIONS

Rated Current:2.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

260°C $\pm 5^\circ\text{C}$, 10s(PA6T&PA9T&LCP insulator)

Ordering Information

PM 200 - * - N - WC - * - **

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2-40Pin

Type
= 直插 (Pin)
= 贴片 (SMD)
= 贴片 (SMD)
= 贴片 (SMD)

Length
(Plastic)
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司 ShenzhenhuaciantianluELECTRONICS CO., LTD			
			DIM	TOL	审核				
			X.X	± 0.30	批准	产品名称	2.00双排 排母 蜈蚣脚(塑高4.3)	版本	A
			X.XX	± 0.20	CHECK	TITLE	PM200-2-N-WC-4.3-XX(L7.3)	REV.	
1	初版发行		X.XXX	± 0.10	比例	产品料号		单位	mm
序号	变更内容	日期	Angle	$\pm 3.0^\circ$	SCALE	PART NO.		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE	投影		Projection	MATERIAL		SHEET	