



SPECIFICATIONS
Rated Current:2.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:400V AC/DC
Insulation Resistance:800MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: Polyester(UL94V-0)
Resistance To Soldering Heat:
245°C ±5°C. 10s(PBT insulator)
260°C ±5°C. 10s(PA6T&PA9T&LCP insulator)

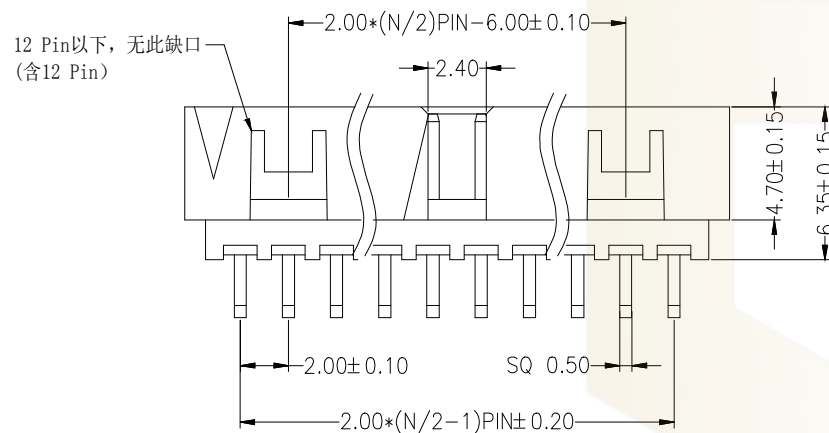

Ordering Information

HC-JN 200 - * - N - W - * - **

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 03~32Pin	Type Z-直插 W-弯插 S-立插 WS-贴片	Length (Plastic) (塑高)	Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold S1:Tin	Plating Flash Flash Flash Flash Flash Flash Flash/Tin
---	-------------------------	---------------------------------------	-----------------------------	--	--

			GENERAL TOLERANCE		制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM	TOL	审 核 CHECK					
			X. X	±0.30	批 准 APPROVAL	产品名称 TITLE	简牛2.00 双排 弯针	版 本 REV.	A	
1	初版发行		X. XX	±0.20	比 例 SCALE	产品料号 PART NO.	HC-JN200-2-N-W-6.35-XX	单 位 UNITS	mm	
			X. XXX	±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°						