
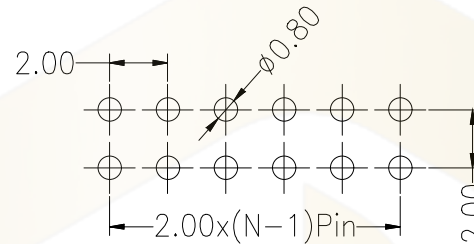


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

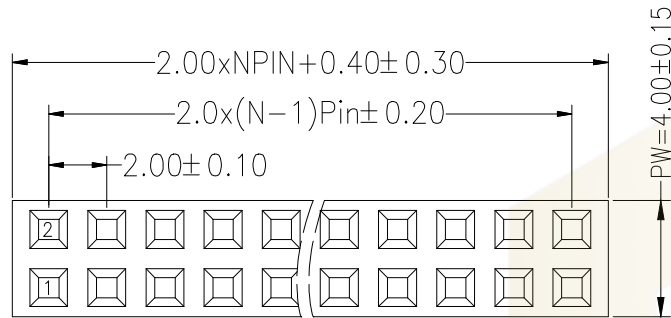

SPECIFICATIONS

Rated Current:2.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass



Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

245°C $\pm 5^{\circ}\text{C}$, 10s(PBT insulator)

260°C $\pm 5^{\circ}\text{C}$, 10s(PA6T&PA9T&LCP insulator)

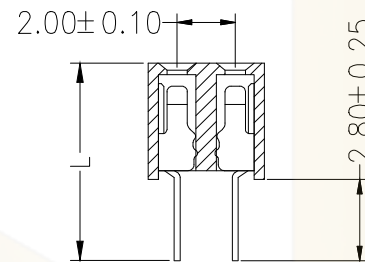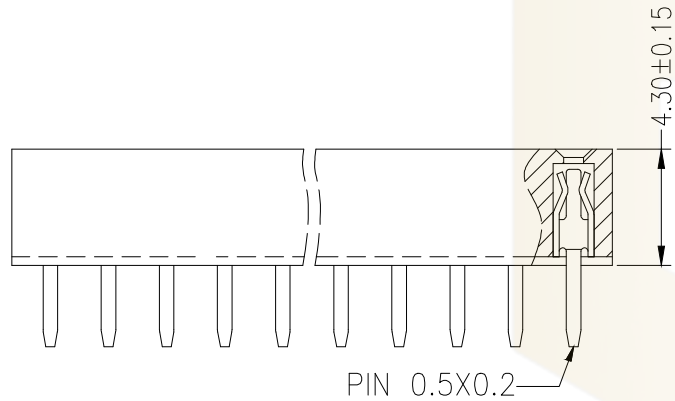

Ordering Information

PM	200	-	*	-	N	-	Z	-	*	-	PW*	-	**
No. of Rows 1=Single Row 2=Dual Row		No. of Pins 2~40Pin		Type Z=直針 B=彎針 S=立腳 P=插腳		Length (Plastic) (mm)		Plastic Width (mm)		Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin			

深圳市华灿天禄电子有限公司 工程专用章			GENERAL TOLERANCE		制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD								
			DIM	TOL	审 核 CHECK		产品名称 TITLE		2.00双排 排母 直针 塑宽4.0 塑高4.3		版 本 REV.		A	
			X.X	±0.30	批 准 APPROVAL									
			X.XX	±0.20	比 例 SCALE		产品料号 PART NO.		PM200-2-N-Z-4.3-PW4.0-XX(L7.1)		单 位 UNITS		mm	
			X.XXX	±0.10	投 影 Projection									
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°		材 料 MATERIAL		页 次 SHEET		1/1				