
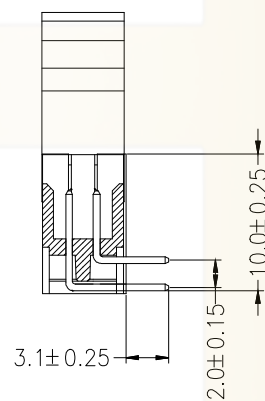
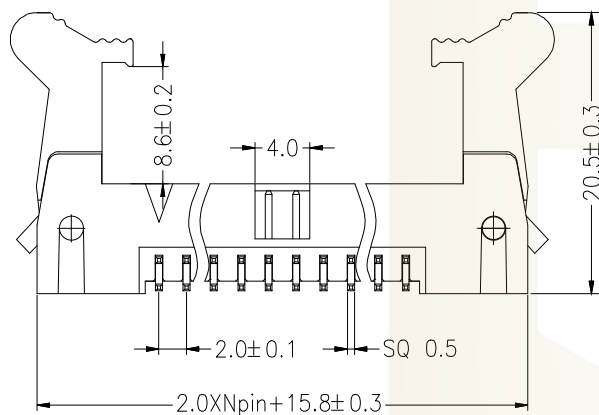


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

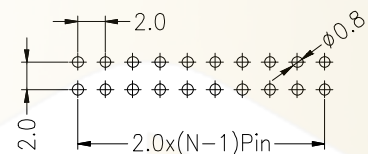

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩMax
Withstand Voltage:500V AC/DC
Insulation Resistance:800MΩMin
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Ordering Information

HC-NJ 200 - * - N - * - * - * - *

No. of Rows
2=Dual Row

No. of Pins
03-32Pin

Type
2=03
3=04
5=06

Length
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

Color
B=Black
G=Grey

Latch Type
L=Long Latch
S=Short Latch
M=Middle Latch
N= Without Latch

			GENERAL TOLERANCE		制 图				
			DIM	TOL	DRAWING				
			X. X	±0.30	审 核	产品名称	2.00 牛角 弯针(长耳扣)	版 本	A
			X. XX	±0.20	批 准	TITLE		REV.	
1	初版发行		X. XXX	±0.10	比 例	产品料号	HC-NJ200-2-N-W-20.5-XX-X-L	单 位	mm
序号	变更内容	日期	Angle	±3.0°	投 影	PART NO.		页 次	1/1
No.	MODIFY CONTENT	MODIFY DATE			Projection	MATERIAL		SHEET	