
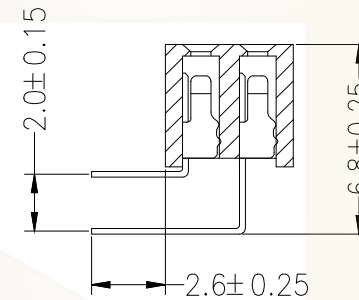
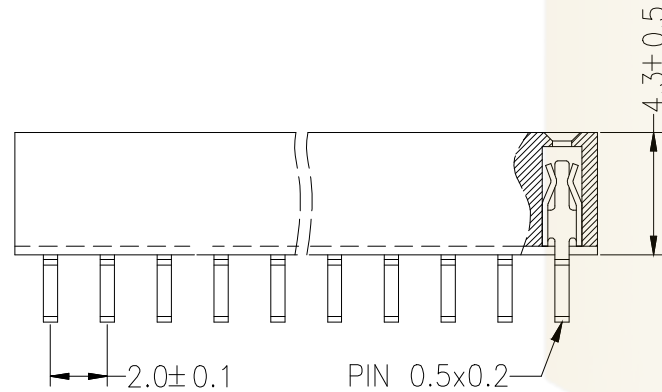
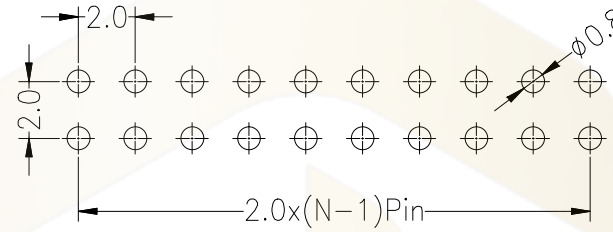


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

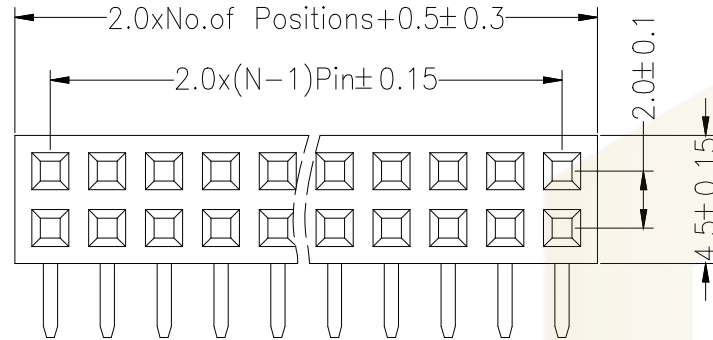

Ordering Information

PM 200 - * - N - W - * - **

No.of Rows
1=Single Row
2=Dual Row
No.of Pins
2-40Pin
Type
Z-直针
W-弯针
S-直针
W-弯针
Length
(Plastic)
(mm)
Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
			DIM	TOL	审核 CHECK			
			X.X	±0.30	批准 APPROVAL	产品名称 TITLE	2.00双排 排母 弯针 (塑高4.3)	版本 REV.
			X.XX	±0.20	比例 SCALE	产品料号 PART NO.	PM200-2-N-W-4.3-XX (L6.8)	单位 UNITS
			X.XXX	±0.10	投影 Projection	材料 MATERIAL		页次 SHEET
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°				1/1