


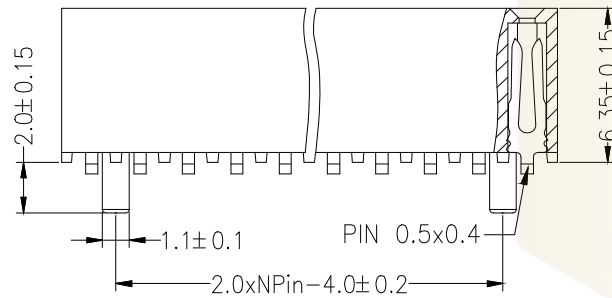
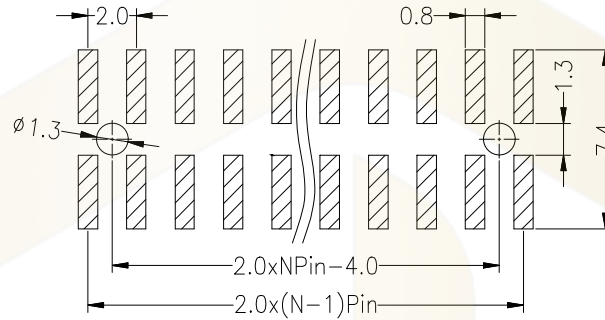


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

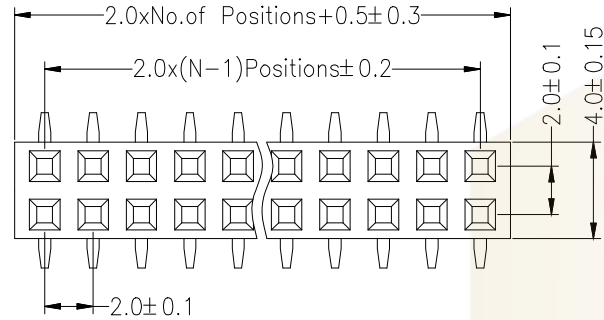

P=With Post



默认=W/O Post

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 5-10 seconds)

Ordering Information

PM 200 - * - N - S - * - ** - P

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2-40Pin	Type 2=直针 8=弯针 S=立贴 M=带帽	Length (Plastic) (塑高)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Post (带柱)
--	-----------------------	--------------------------------------	-----------------------------	--	--------------

			GENERAL TOLERANCE		制图				
			DIM TOL		DRAWING				
			X.X ± 0.30		审核				
			X.XX ± 0.20		批准				
			X.XXX ± 0.10		比例				
1	初版发行		Angle $\pm 3.0^{\circ}$		SCALE	产品名称	2.00双排 排母 贴片(塑高6.35)	版本	A
序号	变更内容	日期			投影	产品料号	PM200-2-N-S-6.35-XX(L6.95)	单位	mm
No.	MODIFY CONTENT	MODIFY DATE			Projection	材料		页次	1/1
						MATERIAL		SHEET	