
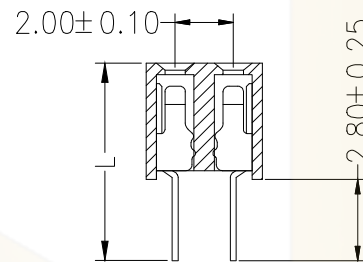
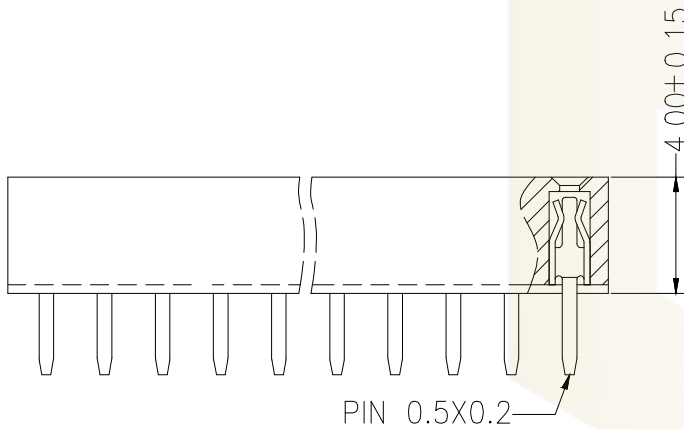
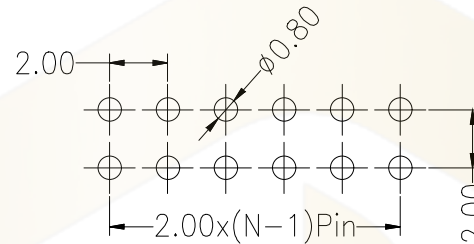


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

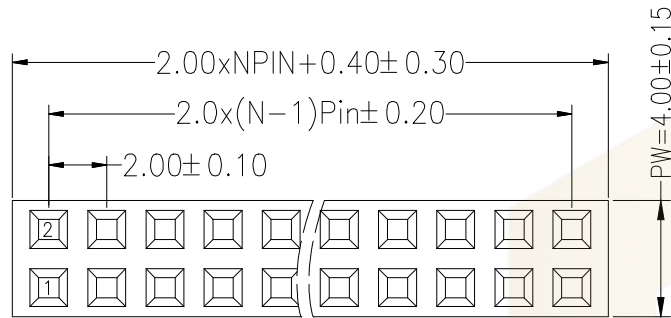

PIN 0.5X0.2

SPECIFICATIONS

Rated Current:2.0AMP

Contact Resistance:20m Ω Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000M Ω Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

245°C $\pm 5^{\circ}\text{C}$, 10s(PBT insulator)

260°C $\pm 5^{\circ}\text{C}$, 10s(PA6T&PA9T&LCP insulator)

Ordering Information

PM 200		*	N	Z	*	PW*	**
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2=40Pin	Type 2=直针 3=弯针 4=插针	Length (Plastic) (mm)	Plastic Width (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin		

GENERAL TOLERANCE			制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
DIM TOL			审核 CHECK	产品名称 TITLE	2.00双排 排母 直针 塑宽4.0 塑高4.0	版本 REV.	A
X.X ± 0.30			批准 APPROVAL	产品料号 PART NO.	PM200-2-N-Z-4.0-PW4.0-XX(L6.8)	单位 UNITS	mm
X.XX ± 0.20			比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
X.XXX ± 0.10			投影 Projection				
Angle $\pm 3.0^{\circ}$							
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE					