

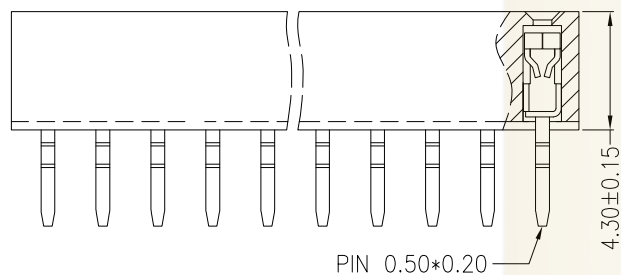
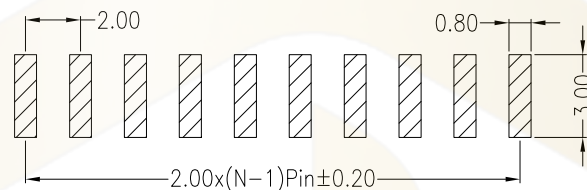


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

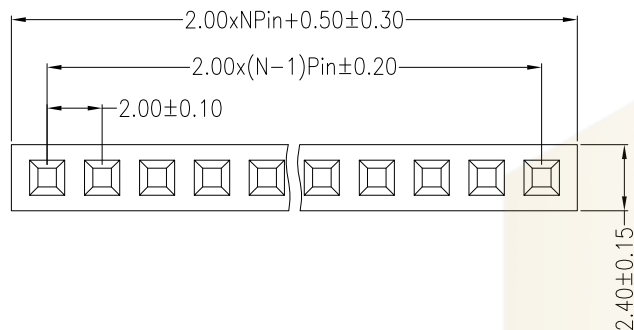

SPECIFICATIONS

Rated Current:2.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Phosphor bronze

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Max.Processing Temp:

(PA6T/LCP/PA9T)260°C±5°C For 5~10 Second

Ordering Information

PM 200 - * - N - WS - * - **


No.of Rows
1=Single Row
2=Dual Row

No.of Pins
2~40Pin

Type
(=04)
(=08)
(=16)
(=20)
(=24)
(=28)
(=32)
(=36)
(=40)

Length
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制 图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM	TOL	审 核 CHECK					
			X.X	±0.30	批 准 APPROVAL					
			X.XX	±0.20	比 例 SCALE					
1	初版发行		X.XXX	±0.10	投 影 Projection		产 品 名 称 TITLE	2.00单排 排母 卧贴 塑高4.3	版 本 REV.	A
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°			产 品 料 号 PART NO.	PM200-1-N-WS-4.3-XX(L7.8)	单 位 UNITS	mm
							材 料 MATERIAL		页 次 SHEET	1/1