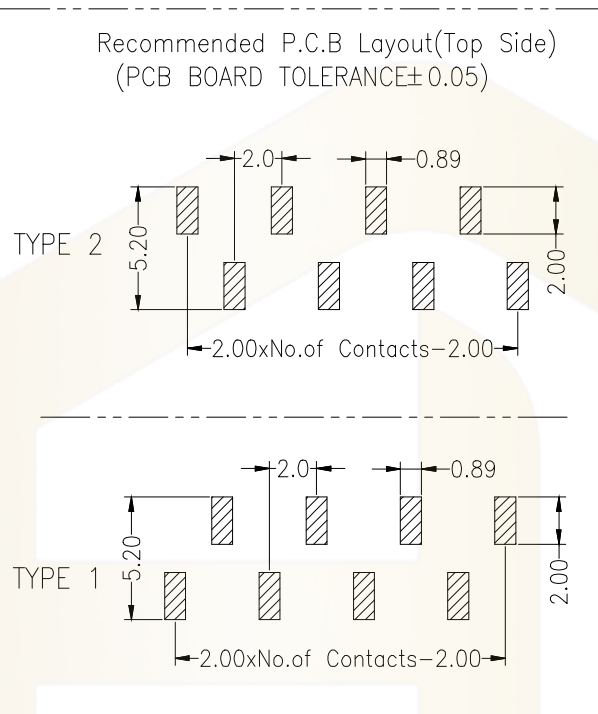
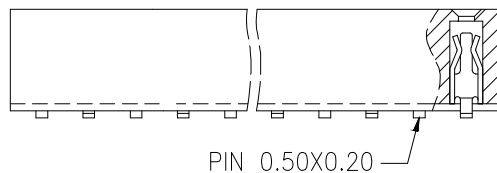
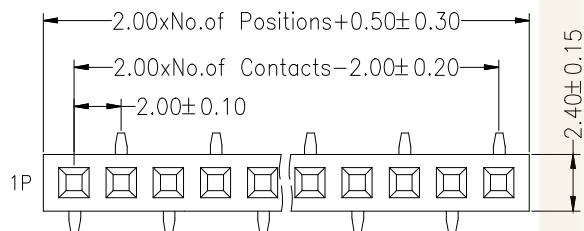
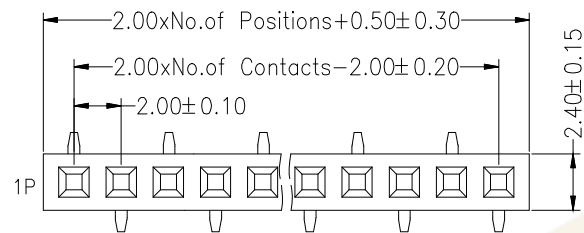


SPECIFICATIONS

Rated Current:2.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Resistance To Soldering Heat:

260°C ± 5°C , 10s(PA6T&PA9T&LCP insulator)

Ordering Information

PM 200	- *	- N	- *	- *	- **	- *
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2~40Pin	Type 2=单排 N=双排 S=直插 R=反插	Length (mm)	Contact G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Plating	TYPE 1 TYPE 2

		GENERAL TOLERANCE		制 图 DRAWING		 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
		DIM TOL		审 核 CHECK					
		X. X ±0.30		批 准 APPROVAL		产品名称 TITLE	2.00 单排 排母 贴片 塑高4.3	版 本 REV.	A
1 初版发行		X. XX ±0.20		比 例 SCALE		产品料号 PART NO.	PM200-1-N-S-4.3-XX-X(L4.6)	单 位 UNITS	mm
序号 No.		变更内容 MODIFY CONTENT		日期 MODIFY DATE		材料 MATERIAL		页 次 SHEET	1/1
		X. XXX ±0.10		投 影 Projection					
		Angle ±3.0°							